

Unit Mounts - Wall and Roof

Xtra Wall Brackets

Xtra Brackets are quick and easy to install. Available in two finishes - heavy gauge electro galvanised powder coat & 304 stainless steel.

The brackets come complete with high quality wall fixings, anti vibration mounting pads and a liquid spirit level for a professional install.

Adjustable rear bolt allows up to 5° of correction against the wall.



MFW Part Number	Type	Max Load		Dimensions (mm)		
		(kg)	(mm)	D	W	H
B6381	Powder Coated	100	450	450	800	350
B6382	Powder Coated	150	550	550	850	450
B6386	Stainless Steel	100	450	450	800	350
B6387	Stainless Steel	150	550	550	850	450

Pacific Wall Brackets

The Pacific Bracket series has been designed for fast and easy installation.

The partially assembled adjustable bracket is made of electro-galvanized steel with a powder coated finish. Brackets are supplied with Dynabolt fixings, rust resistant bolts for anti-corrosion and vibration dampers.



MFW Part Number	Type	Max Load (kg)	Dimensions (mm)		
			D	W	H
PSGK81	Powder Coated	100	450	800	380
PSGKL83	Powder Coated	150	550	850	420

Cantilever Strut Bracket Sets

Cantilever Bracket Kits are hot dipped galvanised with slotted channel to assist with drainage should water get into the channel.

Supplied complete with Pro Pipe's uniquely designed rubber mount (4 pieces) for easy adjustment and reduced vibration. The brackets are 'ready to go' complete with either coach screws and plug or masonry bolts. You choose the best method to fix the bracket to the wall.



MFW Part Number	Type	Max Load (kg)	Dimensions (mm)	
			D	H
CB450	Cantilever	150	490	280
CB600	Cantilever	150	640	280
CB750	Cantilever	150	790	280

Xtra Roof Brackets

Xtra Roof Brackets are quick and easy to install. Available in two finishes - heavy gauge electro galvanised powder coat & 304 stainless steel.

The brackets come complete with high quality wall fixings, anti vibration mounting pads and a liquid spirit level for a professional install.

Adjustable rear bolt allows up to 5° of correction against the wall.



MFW Part Number	Type	Max Load (kg)	Dimensions (mm)		Pitch
			D	W	
B6388	Powder Coated	150	220-500	1000	0-45°
B6389	Stainless Steel	150	220-500	1000	0-45°



Unit Mounts - Ground

Pacific Mounting Blocks

Produced with high quality PVC, our mounting blocks are shockproof and stabilised against UV rays.

Comes complete with mounting bolt & nuts, along with one end cap for each block. More end caps can be purchased separately.



MFW Part Number	Dimensions (mm)			Max Load (kg)		
	D	L	H	200	800	350
PDMB	105	450	95			
PSR4511	Ivory End Cap (2pk)					

Adjustable Unit Support

This adjustable unit support (AUS1) is the quickest and easiest way to mount a unit on uneven ground and comes as a set of 4 complete with easy to install locking pin and rubber mount for anti-vibration.

Rubber o-rings also included to give the base increased grip and reduced vibration. Supports up to 1000kg per set with flexible angle adjustment and easy height adjustment ranging from 0-30mm.



MFW Part Number	Dimensions (mm)			Max Load (kg)
	W	L	H	
AUS1	110	110	110-140	1000
AUSS	Adjustable Spanner			
AUSMB	Ground Fixing Bracket (set of 4)			

Anti Vibration Mounts

The following 4-pack vibration mounts & pads are made from rubber/EPDM designed specifically for mounting air conditioning units.

They are very sturdy and provide a great reduction to vibration and noise levels. Includes threaded mounting bolt and nut. Rated to 400kg per set of 4.


MFW Part Number	Description	Max Load
VM1SQ	VM 25mm Square	1000kg
VMCB	VM 40mm Strut	240kg
VMP	VM Pad	
VM2	VM 50mm	320kg
VM3	VM 75mm	
VM4	VM 91mm	
VM400A	VM Adjustable	200kg
VM400HDG	VM Adjustable HDG	



Ripper Waffle Pad

18 pieces per sheet with pre drilled holes.

MFW Part Number	Description
VVP3030R	Rippable Vibration Waffle Pad 300 x 300mm Square Sheet

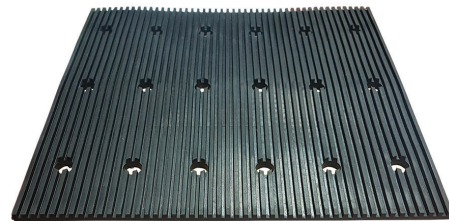

Big Foot Mount Set

Fix It Foot are a neat and tidy roof top support solution from Big Foot.

The feet have 40mm x 20mm aluminium channel recessed into the top face to allow for each fixing of services. Suitable for pipework, duct and cable tray runs. Made of durable, recycled rubber which offers built in anti-vibration and makes it both economical and environmentally responsible.

MFW Part Number	Dimensions (mm)			Max Load Per Foot (kg)
	W	L	H	
B9368SET	130	500	50	134






Unit Mounts - Slabs and Bases

Polyslab

These polyslabs have a load capacity of 160kg each.

POLYSLABM suits 2.5kW to 8.0kW domestic & light commercial split air conditioning units while the POLYSLABL suits 8.0kW to 15kW domestic & light commercial split air conditioning units.

MFW Part Number	Dimensions (mm)			Max Load (kg)
	W	L	H	
POLYSLABM	465	885	51	160
POLYSLABL	650	1130	51	160

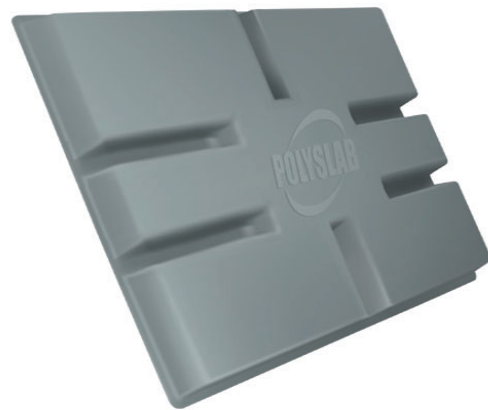


Isolation Pads & Condenser Guards

Embelton Isolation Pads

Pad mounts are a low cost isolator effective for machinery and equipment with higher disturbing frequencies such as small air conditioners, business machines, machine tools etc.

Pad mounts are also an effective isolator of shock. Shearflex are the standard Embelton Pad Mounts offering static deflection up to 20mm. Multiple pad layers, interleaved with metal plates, can be used to offer higher static deflection. All pad mounts can be bonded to flexplates where load spreading is required, or where the machine base is provided with levelling screws.

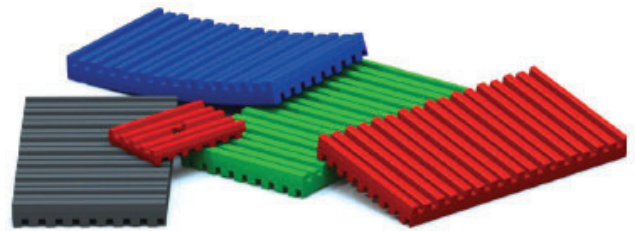

MFW Part Number	Dimensions (mm)			Colour
	W	L	H	
SXB	450	450	8	Black
SXR			10	Red
SXG			16	Green
SXBX			20	Black - Large

Condenser Guards

Made of heavy duty angle iron, 25mm steel mesh and hot dipped galvanised to last.

Can be bolted to a wall or fastened to a concrete pad. The front access panel can be padlocked for maximum security. Easy & quick to install. Easy to handle & store.

MFW Part Number	Dimensions (mm)		
	W	L	H
ACG9	1000	600	900
ACG10	1200		1000
ACG12			1200
ACG14			1400
ACG16			1600

