



LC**FMTE / LC**FMWE FLUSH MOUNT LOAD CENTRES

CONSTRUCTION & CHASSIS:


- High impact ABS material – UV and flame resistant
- Smoked transparent (LC**FMTE) / Opaque door colour (LC**FMWE)
- Current rating: 100 A
- Voltage rating: 415 V
- Insulation Voltage rating: 1000 V
- IP rating: IP40
- MCB/RCD/RCBO type: DIN Profile



FLUSH COVER

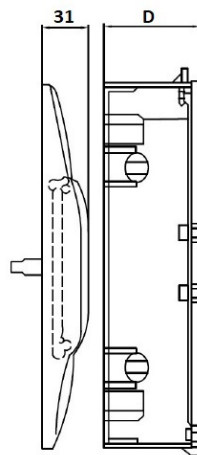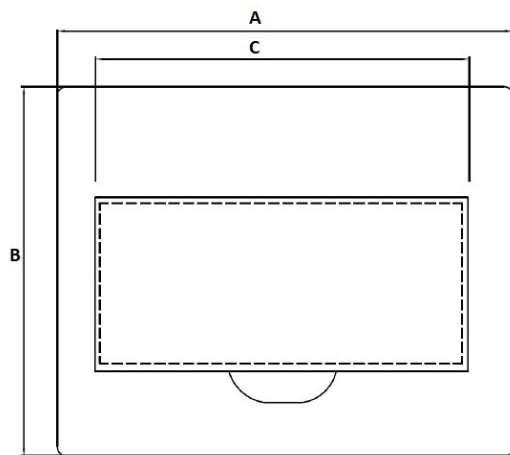

BASE

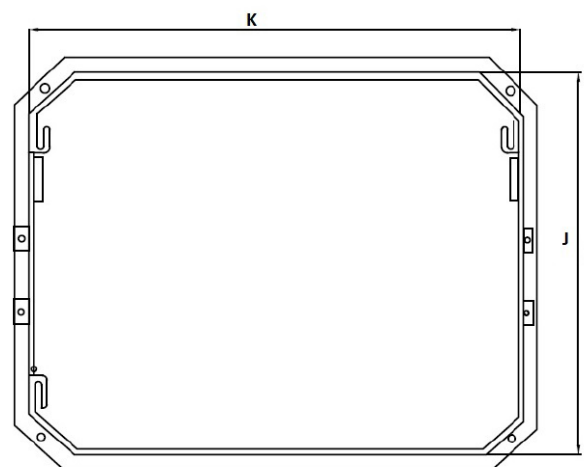

Model No.	Rows	Pole	Dimensions (mm)					
			A	B	C	D	J	K
LC04FM*E	1	4	223	137	91	65	115	200
LC06FM*E	1	6	247	196	128	65	150	200
LC08FM*E	1	8	248	234	165	65	187	200
LC12FM*E	1	12	305	247	238	68	201	256
LC18FM*E	1	18	408	268	351	77	215	366
LC24FM*E	2	24	305	355	235	74	258	310
LC36FM*E	3	36	500	340	275	73	293	455

* T - Transparent Door
W - Opaque Door