




Brass Reducer for Hazardous Areas

FEATURES:

- For indoor or outdoor use
- Reduces enclosure mounting thread to suit fitting/gland
- Degree of protection against ingress of water IP66/68
- Compliance with IECEx CES 13.0022X
- Locknut is supplied as standard

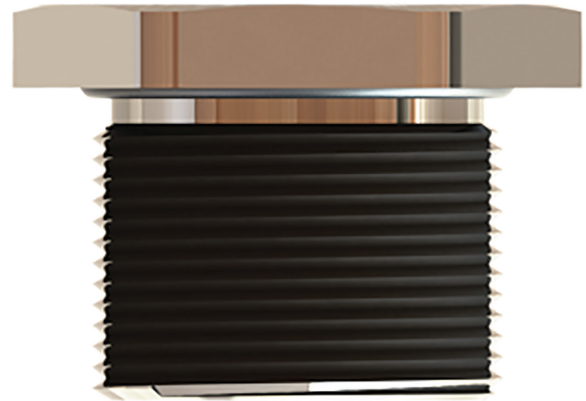

Protection types: Ex db IIC Gb, Ex eb IIC Gb, Ex tb IIIC Db, IP66/68

Standards: IEC/AS/NZS60079 (.0, .1, .7, .31), IEC/AS/NZS 60529

Material: Brass, Nickel Plated

Seal: Silicone (Metric only)

Temperature Range: -60°C/+130°C

Cat. No.	Male Thread Diameter x Length	Female Thread Diameter x Length	Reducer Diameter		Length	Torque - NM
			Across Flats	Across Points		
Metric Thread						
ALCBIMBRBM16M12	M16 x 15	M12 x 19	22	24	19	4
ALCBIMBRBM20M12	M20 x 15	M12 x 19	25	27.5	19	5.5
ALCBIMBRBM20M16	M20 x 15	M16 x 19	25	27.5	19	5.5
ALCBIMBRBM25M16	M25 x 15	M16 x 19	30	33	19	6
ALCBIMBRBM25M20	M25 x 15	M20 x 19	30	33	19	6
ALCBIMBRBM32M20	M32 x 15	M20 x 19	36	39.5	19	6
ALCBIMBRBM32M25	M32 x 15	M25 x 19	36	39.5	19	6
ALCBIMBRBM40M25	M40 x 18	M25 x 22	45	50	22	12
ALCBIMBRBM40M32	M40 x 18	M32 x 22	45	50	22	12
ALCBIMBRBM50M32	M50 x 18	M32 x 23	55	61	23	18
ALCBIMBRBM50M40	M50 x 18	M40 x 23	55	61	23	18
ALCBIMBRBM63M40	M63 x 18	M40 x 23	70	77	23	25
ALCBIMBRBM63M50	M63 x 18	M50 x 23	70	77	23	25
ALCBIMBRBM75M50	M75 x 18	M50 x 24	85	94	24	30
ALCBIMBRBM75M63	M75 x 18	M63 x 24	85	94	24	30
ALCBIMBRBM90M63	M90 x 21	M63 x 29	100	111	29	35
ALCBIMBRBM90M75	M90 x 21	M75 x 29	100	111	29	35
NPT Thread						
ALCBIMBRBN34M20	NPT 3/4" X 15	M20 x 19	30	33	19	-
ALCBIMBRBN100M25	NPT 1" X 15	M25 x 19	36	39.5	19	-

All dimensions in mm unless otherwise specified. Note: metric threads 1.5mm pitch, unless otherwise specified.



Like us on Facebook
@Alco.cableglands



Follow us on Instagram
@alco_cableglands



P: 1300 300 747
www.wattmaster.com.au