


Wattmaster

THE BRAND ELECTRICIANS RELY ON

Insulated Heatshrink Ring Terminals

FEATURES:

- Heatshrinkable ring terminals provide water resistant connections
- Single crimp insulation seal
- Electro tin plated
- 600V max
- Shrink temperature: +150°C
- Operating temperature: -10°C to + 105°C

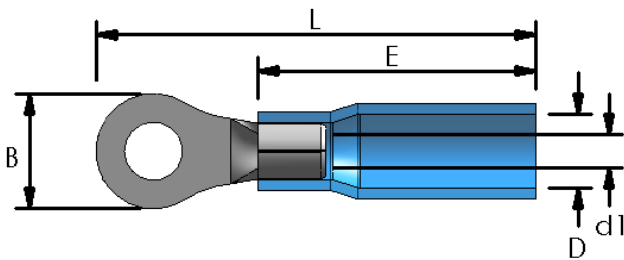

SPECIFICATIONS:

PART NUMBER	CONDUCTOR SIZE (MM ²)	STUD SIZE (MM)	DIMENSIONS (MM)					PACK QTY	COLOUR
			B	L	E	D	D1		
ALCHSRR3.7/100	0.5-1.5	3.7	8.0	26.0	18.5	4.5	1.7	100	Red
ALCHSRR4/100	0.5-1.5	4.0	8.0	26.0	18.5	4.5	1.7	100	Red
ALCHSRR5/100	0.5-1.5	5.0	8.0	26.0	18.5	4.5	1.7	100	Red
ALCHSRB3.7/50	1.5-2.5	3.7	8.5	28.5	20.5	5.5	2.3	50	Blue
ALCHSRB4.0/50	1.5-2.5	4.0	8.5	28.5	20.5	5.5	2.3	50	Blue
ALCHSRB5.0/50	1.5-2.5	5.0	9.5	28.5	20.5	5.5	2.3	50	Blue
ALCHSRY4.0/50	4.0-6.0	4.0	9.5	33.0	23.5	6.5	3.4	50	Yellow
ALCHSRY5.0/50	4.0-6.0	5.0	9.5	33.0	23.5	6.5	3.4	50	Yellow
ALCHSRY6.0/50	4.0-6.0	6.0	12.0	36.5	23.5	6.5	3.4	50	Yellow
ALCHSRY13.0/25	4.0-6.0	13.0	19.2	45.5	23.5	6.5	3.4	25	Yellow

Wattmaster

THE BRAND ELECTRICIANS RELY ON

T: 1300 300 747 F: 1300 300 074

www.wattmaster.com.au