




Nylon Conduit Holders

Supports with integrated lid for securing sections of corrugated conduits between the various parts of the electrical installation. With conduit entry guide.

Specially indicated for demanding securing situations e.g. ceilings.

FEATURES:

- Operating temperatures: -40°C to +105°C.
- Colour: Black.
- Supports manufactured from high-quality polyamide (Nylon 6).
- Halogen, Phosphorus and Cadmium free.
- Shock resistant and flame resistant.
- For securing sections of corrugated conduits between the various parts of the electrical installation on machines.
- With conduit entry guide.
- Base for the fixation to RWL support guide.

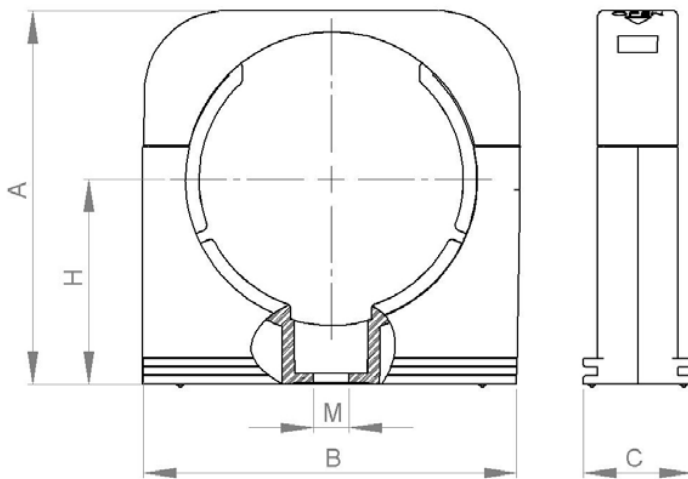

Part Number	Size (mm)	A (mm)	B (mm)	C (mm)	H (mm)	Pack Size
ALCSWL-12N	16	27	25	20	15	100
ALCSWL-17N	20	33	31	20	19	100
ALCSWL-23N	25	42	40	20	23	50
ALCSWL-29N	32	47	46	20	26	30
ALCSWL-36N	40	56	56	20	31	20
ALCSWL-48N	50	70	70	20	39	10