

Thin Wall Glue Lined Heatshrink

Heatshrink is ideally used for heavy duty and general purpose use i.e. electrical insulation, termination, splicing, bundling, cable protection and strain relief. Thin wall glue lined heatshrink will also make a waterproof seal between cable sheath and heatshrink tube.

- Suitable for waterproof cable joints and terminations. Diameters from 1 to 125mm.
- Low shrink temperature and flame retardant
- Flexible and UV resistant
- RoHS Compliant
- UV Stable glue lining
- High reduction (3:1) tubing
- Black colour only

Shrink Temperature: $\geq 95^{\circ}\text{C}$

Shrink Ratio: Radial Shrinking Ratio: $> 3:1$

Longitudinal Shrinking Ratio: $< 10\%$

Tensile Strength: $\geq 12\text{ MPa}$


Elongation at Break: $\geq 300\%$

Material: Polyolefin

Operating Temperature: $-45^{\circ}\text{C} - 125^{\circ}\text{C}$

NO DRIPPING
NO CRACKING
NO BREAKDOWN

Low shrink
temperature and
flame retardant

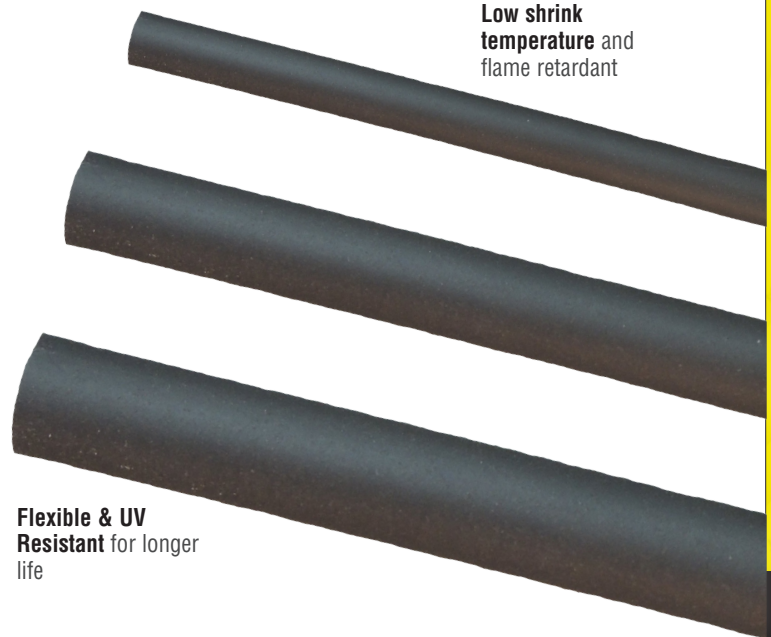

Flexible & UV
Resistant for longer
life

Cat. No.	Min Inside Diameter As Supplied (mm)	Fully Recovered After Heating (mm)			Application Range (mm)	Length (M)
		Max I.D	Total W.T	Adhesive Thickness		
HSTNWGL3.2/1	3.2	1.00	0.95	0.40	1.0 - 3.1	1.2
HSTNWGL4.8/1.6	4.8	1.60	1.10	0.40	1.8 - 4.6	1.2
HSTNWGL6.4/2.2	6.4	2.20	1.20	0.45	2.4 - 6.4	1.2
HSTNWGL9.5/3.2	9.5	3.20	1.45	0.50	3.4 - 9.4	1.2
HSTNWGL12.7/4.2	12.7	4.20	1.70	0.50	4.4 - 12.5	1.2
HSTNWGL19.1/6.3	19.1	6.30	2.00	0.60	6.5 - 18.8	1.2
HSTNWGL25.4/8.5	25.4	8.50	2.10	0.60	8.8 - 25	1.2
HSTNWGL39/13.5	39.0	13.50	2.40	0.60	14.0 - 39	1.2
HSTNWGL50/17	50.0	17.00	2.70	0.75	17.5 - 49	1.2
HSTNWGL76/25	76.0	25.00	3.20	1.05	26 - 72	1.2