



EXTERIOR INGROUND UP LIGHTS

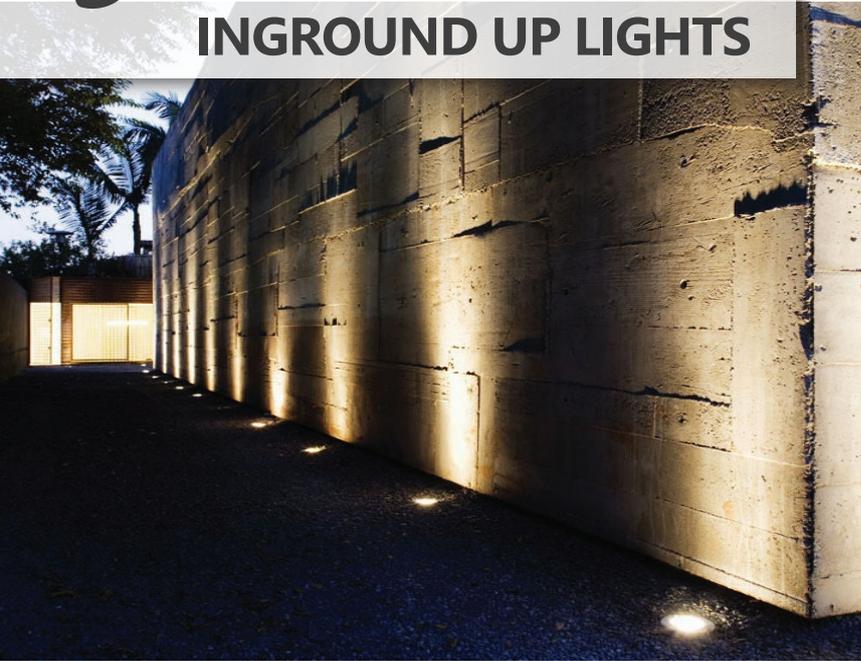

PRODUCT FEATURES

- Input voltage : 12-25V DC / AC
- External Control Gear Required
- Globe not included
- Fixed MR16 Lampholder
- Max 20W Halogen Globe
- Recommended CLA LED globes : MR1601 and MR1602
- Material : 316 Stainless steel, solid copper or solid brass faceplates
- Plastic sleeve included (must be installed)
- Fitting slides and screws into sleeve
- Cable included (L950mm)
- 8mm tempered glass, max load capacity 600kg

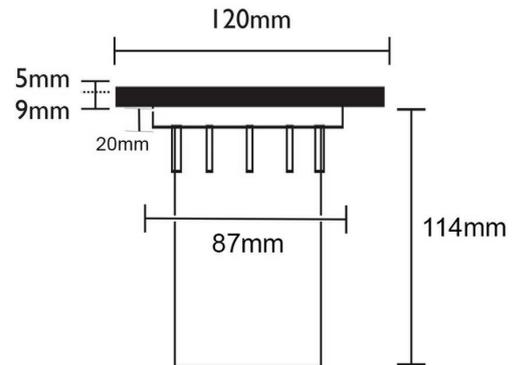

CODE	DESCRIPTION	PACKAGING DETAILS			
		COLOUR	WEIGHT (KG)	BOX (CM)	CARTON QTY
IGMLBR	INGROUND UPLIGHTER / OPEN WALL MR16 12V Brass LGE RND	Aged Brass	0.7	13.5 x 13 x 13	20
IGMLC	INGROUND UPLIGHTER / OPEN WALL MR16 12V COP LGE	Polished copper	0.7	13.5 x 13 x 13	20
IGMLSS	INGROUND UPLIGHTER / OPEN WALL MR16 12V SS316 LGE RND	316 Stainless steel clear anodized	0.7	13.5 x 13 x 13	20
IGMLSQBR	INGROUND UPLIGHTER / OPEN WALL MR16 12V BRASS SQ LGE	Aged Brass	0.7	13.5 x 13 x 13	20
IGMLSQC	INGROUND UPLIGHTER / OPEN WALL MR16 12V COP LGE SQ	Polished copper	0.8	13.5 x 13 x 13	20
IGMLSQSS	INGROUND UPLIGHTER / OPEN WALL MR16 12V SS316 LGE SQ	316 Stainless steel clear anodized	0.8	13.5 x 13 x 13	20

UPDATED ON 12/12/2017