

SEC SERIES

Surface mounted **LED PAR30** Security Lights with / without sensor



SEC01



SEC01S (with sensor)



SEC02



SEC02S (with sensor)


Fitting Features:

- Adjustable: up/down & side to side
- Input voltage: 200-240V AC
- Housing: PBT + PC
- E27 lamp holder
- Max.150W halogen PAR30 globes
- **10W LED PAR30 globes included**

Sensor Spec:

- Detection range: 180°
- Detection distance: 5-12m
- Detection motion speed: 0.6-1.5m/s
- Rated load: 1200W (HAL) 300W (CFL & LED)
- Time delay: Min: 10s±3s; Max: 10m±10m
- Ambient light: 3-2000 lux (adj)
- Ambient temp: -10 to 40°C
- Installation height: 1.8-2.5m
- Manual override via light switch

IP44
Rated




3 YEAR
Replacement
Warranty


Part No.	Description	GLOBE SPECIFICATION						WEIGHT (KG)	BOX (CM)	CARTON QTY
		LED	KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	BEAM ANGLE			
SEC01	SECURITY PAR30 ES S/ADJ BLK without sensor	10PCS SMD 2835	5000	800	10	80	40°	0.4	22x11x11	40
SEC01S	SECURITY PAR30 ES S/ADJ BLK with sensor		5000	800	10	80	40°	0.55	25x15x11	32
SEC02	SECURITY PAR30 X 2 ES D/ADJ BLK without sensor		5000	2x800	2x10	80	40°	0.65	32x13x11	24
SEC02S	SECURITY PAR30 X 2 ES D/ADJ BLK with sensor		5000	2x800	2x10	80	40°	0.85	30x14x14	24

Globe Other Spec:


- Power factor: ≥0.5
- Suitable for 2-way switching
- Suitable for use with PIR sensor
- Life time: 30,000hrs
- IP rating: IP44
- Ambient temp: -10 to 40°C (The life of the lamp will gradually reduce if used outside these temperature parameters.)




SEC01



SEC01S

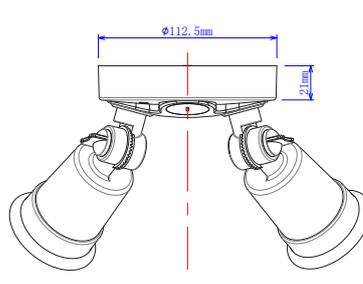

SEC02

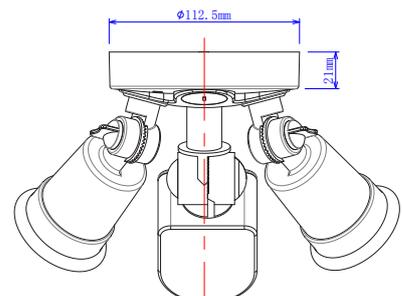

SEC02S

UPDATED ON 03.09.2018

