


Slip Coupling

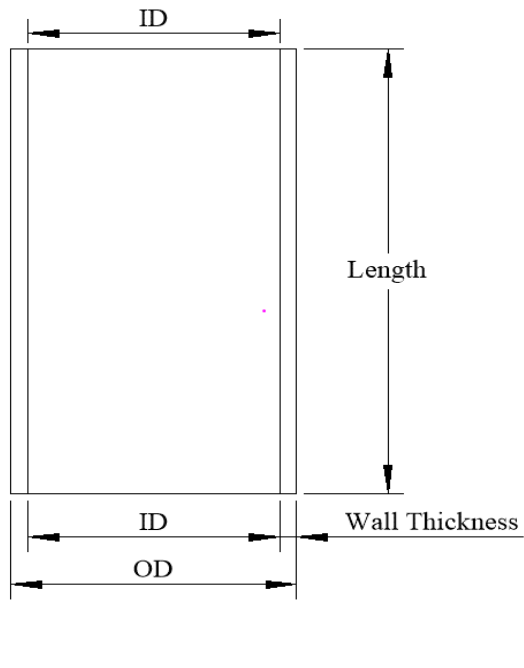

Note

- All drawings, dimension, weights and volume are approximate only if critical please contact us
- Nominal size refers to the outside diameter 20-63 whereas greater than 80 refers to internal dimensions
- Telstra and NBN conduit and fittings dimensions refer to AS/NZS 1477:2017 PVC pipes and fittings for pressure applications
- Only Con-X standard Slip Couplings are listed
- Custom lengths are available and will be POA

DIMENSION TABLE

HD

DN	Length Min	ID	OD (NOM)	Wall Thickness	CON-X finish length
32	50	32.4	37.8	2.7	60
40	65	40.4	46.6	3.1	75
50	80	50.4	57.2	3.4	100
63	100	63.4	71.2	3.9	120
80	150	89.5	98.7	4.6	180
100	198	115.1	126.9	5.9	210
125	230	141.1	155.5	7.2	295
150	250	161.1	177.7	8.3	295
200	300	226.3	247.3	10.5	350

COM

DN	Length Min	ID	OD (NOM)	Wall Thickness	CON-X finish length
32	50	34.4	39.8	2.7	60
50	80	52.4	59.2	3.4	100
80	150	91.5	100.7	4.6	180
100	198	117.1	128.9	5.9	210.0

TEL / NBN

DN	Length Min	ID	OD (NOM)	Wall Thickness	CON-X finish length
20	70	29.3	34.7	2.7	60
50	80	62.9	69.7	3.4	100
100	198	117.1	128.9	5.9	210.0

Contact

4 Aldinga Street, Brendale, Qld 4500
P.O Box 5066, Brendale QLD, 4500
ABN: 42 606 838 206
Ph: 07 3200 4100

COMPLIES WITH AS/NZS 61386

1/06/2024



**BEST
ENVIRONMENTAL
PRACTICE**



con-x
CONDUIT BENDS & FITTINGS