

Cable Stockings (Grips)

Tubular Double Eye

CABAC's double eye style allows the cable to pass through the grip. The extra eye allows the cable to be lifted into position with one eye, whilst the other eye is used to anchor the cable to a fixture.

The standard double eye style is manufactured from two ply galvanised steel wire strand, with an alloy ferrule and soft eyes. Variations such as galvanised thimbles, copper ferrules, stainless steel strand and stainless steel thimbles are also available. Please contact our sales.



Catalogue No.	To Grip Cable Diameter (mm)	Grip Length Approx. (mm)	Max Pull Approx. (kN)
CG10DE	10-14	350	5
CG14DE	14-19	400	9
CG20DE	19-28	500	15
CG30DE	28-40	600	24
CG45DE	40-55	800	35
CG60DE	55-75	900	62
CG75DE	75-95	1000	98
CG105DE	95-120	1200	133
CG135DE	120-150	1400	187
CG165DE	150-190	1600	283

Ordering Variations


	Standard (No Suffix)	Variation	Suffix
Grip	Gal. Wire Rope	Stainless Steel Rope	SS
Ferrule	Alloy	Copper Ferrule	CF
		Stainless Steel	SF
Eye	Soft	Galvanised Thimble	GT
		Stainless Steel Thimble	ST

EG: Tubular double eye 75mm stocking in stainless with stainless ferrule and eye - CG75DE-SS-SF-ST

Lace Up Offset Eye

CABAC's lace up grips are made flat to allow the grip to be wrapped around the cable at any position, then secured by a lace. These grips are used where it is impractical to use a tubular grip, which has to be fitted and removed from the end of the cable. Lace up grips can be used in the central portion of a hauling job, to load share with a tubular grip. They are also ideal for retro fitting to cables in an industrial or mining application.

The standard lace up style is manufactured from two ply galvanised steel wire strand, with an alloy ferrule and soft offset eye. Variations such as galvanised thimbles, copper ferrules, stainless steel strand, stainless steel thimbles and double eyes are also available. Please contact our sales.

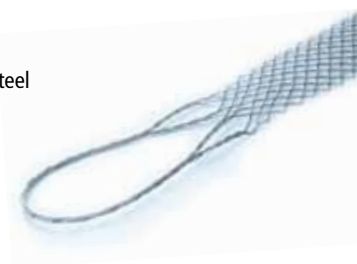

Catalogue No.	To Grip Cable Diameter (mm)	Grip Length Approx. (mm)	Max Pull Approx. (kN)
CG14LU	14-19	500	9
CG20LU	19-28	600	15
CG30LU	28-40	800	24
CG45LU	40-55	900	35
CG60LU	55-75	1000	62
CG75LU	75-95	1200	98
CG105LU	95-120	1450	98
CG135LU	120-150	1900	141
CG165LU	150-190	2100	141

Ordering Variations

	Standard (No Suffix)	Variation	Suffix
Grip	Gal. Wire Rope	Stainless Steel Rope	SS
Ferrule	Alloy	Copper Ferrule	CF
		Stainless Steel	SF
Eye	Soft	Galvanised Thimble	GT
		Stainless Steel Thimble	ST

EG: Lace up offset eye 30mm stocking in stainless steel with stainless ferrule and eye - CG30LU-JJ-SF-ST.