



Representative Photo Only  
(actual product may vary based on configuration selections)

Time delay relay, on delay, 12 - 240V AC/DC, 2 C/O, Panel mount


- Multitude of timing functions available (On Delay, Interval, Off Delay, One Shot, Star-Delta, and Recycler) for practically every application.
- Available in either DIN or Panel mount to suit your preference.
- Variety of relay output types (SPDT, DPDT) and adjustable timing ranges available, dependent on your switching requirements.
- International certifications and wide install base ensuring delivery of a quality tested product.

#### SPECIFICATIONS

Timing Function	ON Delay
Time Range(s)	50ms ... 3s 500ms ... 30s 5 ... 300s 30s ... 30min 5 ... 300min 30min ... 30h 5 ... 300h
Power Consumption	4 / 1.5 VA/W
Nominal Frequency	45-65 Hz
Supply Voltage	12 to 240 VAC/DC
Contact Ratings DC12 at 24 V DC	5 A
Contact Ratings DC 13 at 24 V DC	2.5 A
Contact Ratings AC 15 at 250 V AC	2.5
Contact Ratings AC 1 at 250 V AC	8 A
Contact configuration	1 CO
Housing	48x48mm Panel
Mounting (Multiple)	Plug-in
Time Setting Accuracy	≤ 5 %



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	<a href="#">FAA01DW24_ManufacturerDatasheet</a>
Manufacturer Catalogue & Product Selection:	-

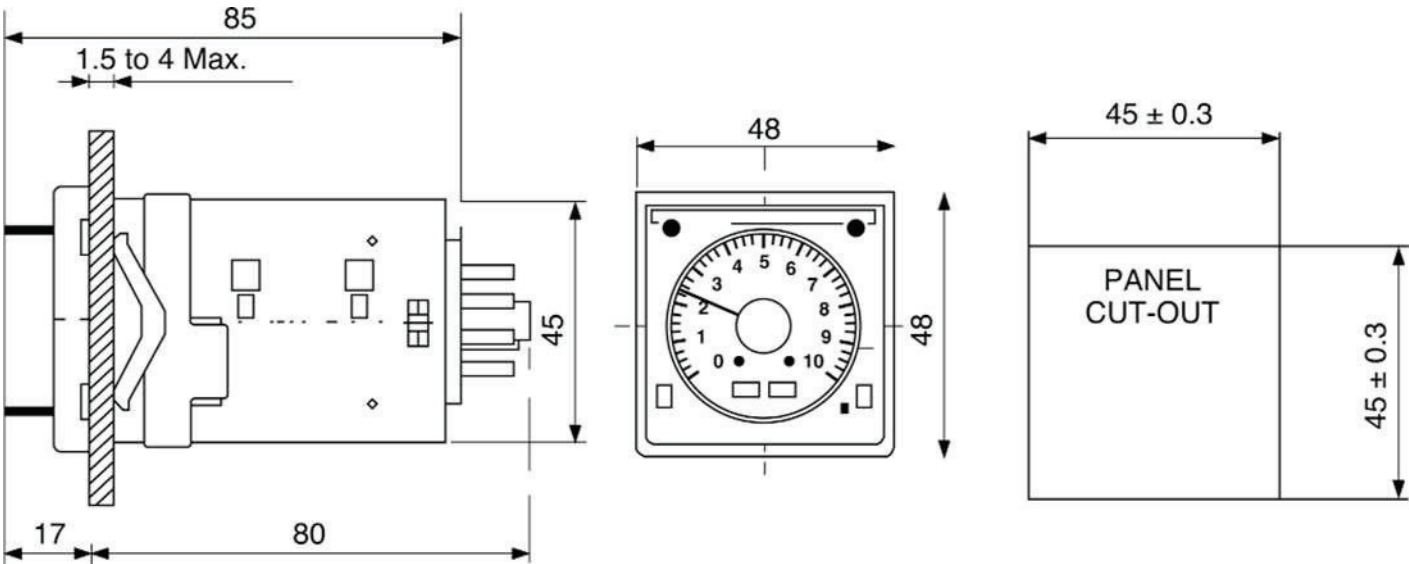

Dimension Diagram

Connection / Wiring Diagram

Technical Diagram