


# Clevertronics

## Lifelight PRO IP 65 Surface Mount Emergency: LWPLIFE-PRO-ZW

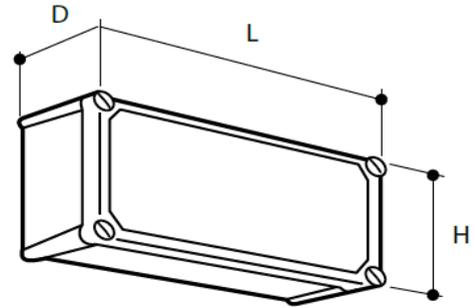

D = 135mm, L=375mm, H= 185mm

### PRODUCT INFORMATION

Catalogue Number	LWPLIFE-PRO-ZW
Description	Lifelight PRO, High Performance, Surface Mount Emergency Luminaire - IP66/67
Mounting	Surface Mount IP65 with integral lamp head, charger pack and battery
Dimensions L x W x H	L=375mm, W=135mm, H= 185mm
Operating Mode	Non-Maintained
Testing System	Zoneworks Computerized Testing
Ballast	Electronic
Charging Method	Intelligent current limited constant voltage charger
Lamp(s)	2 x 3W LED (Lifetime warranty on the lamp head and loom assembly)
Operating Voltage	240V 50Hz
Power Consumption	0.8W (standby)
IP Rating	IP66/67
Impact Rating	IK08
Operating Temperature	0°C to 40°C (Ambient)
AS2293 Classification	C0=D32, C90=D32

### REPLACEMENT PARTS

PART NUMBER	DESCRIPTION
1530230	Battery, 3.3 Volt 5Ah Li-ion
8002390	Driver, PCA: ZONEWORKS Compatible
8001450	Network, Zoneworks Powerline Node
1100830	2 x 3W LED Round Head Assembly - White

