




## NIFTY

Nifty Lifelight Emergency, Recessed Mount, Trade Series

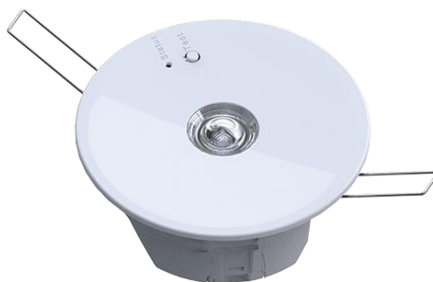

### PRODUCT INFORMATION

|                          |                                                                             |
|--------------------------|-----------------------------------------------------------------------------|
| Part Number              | NIFTY                                                                       |
| MIC                      | AUD03510050001                                                              |
| Description              | Nifty Lifelight Emergency, Recessed Mount, with Flex and Plug, Trade Series |
| Construction             | PC/ABS                                                                      |
| Mounting                 | Recessed mount                                                              |
| Dimensions               | 110mm Head Diameter (140mm with adaptor plate)<br>54mm Height               |
| Cut-Out                  | 90mm (120mm with adaptor plate)                                             |
| Minimum Depth            | 45mm                                                                        |
| Weight                   | 0.3kg (0.4kg with packaging)                                                |
| Operating Mode           | Non-maintained                                                              |
| Testing System           | N/A - Manual test switch                                                    |
| Battery                  | Lithium Iron Phosphate, 3.2V 1500mAh                                        |
| Charging Method          | Intelligent current limited constant voltage                                |
| Lamp(s)                  | 4 x LED                                                                     |
| Operating Voltage        | 240V AC; 50Hz                                                               |
| Power Consumption        | 0.5 Watts (Standby), 1.6 Watts (Max)                                        |
| Power Factor (High)      | 0.352                                                                       |
| Inrush Current           | 26.6A / 47.2μs                                                              |
| Supply Current           | 20.51mA                                                                     |
| IP Rating                | IP40                                                                        |
| Operating Temperature    | 1°C to 40°C                                                                 |
| AS2293 Classification    | C0=D40 C90=D40                                                              |
| Applicable Standards     | AS/NZS3820, CISPR15, AS/NZS2293.3                                           |
| Compliance Marking (RCM) |                                                                             |

### REPLACEMENT PARTS

| PART NUMBER | DESCRIPTION                                 |
|-------------|---------------------------------------------|
| 1560106     | BATT:Eco Lith 3.2V 1.5Ah 80mm lead, no BRKT |

The product details described in this document are current as at the version date of the document. We reserve the right to change product design, specifications or materials (Specifications) as part of our continuous improvement program. Please confirm the applicable Specifications at the time of placing your order.