


Fittings - TWAX Terminator® Cable Glands

Technical Data

Zone 1	Zone 2	Zone 21/22
Type of Protection	Ex d, Ex e, Ex tD	
Degree of Protection	IP66/67	
Gas Group	IIC	
Approvals	IEC Ex TSA09.0024	
Application	Termination of steel wire armoured cables	
Standard Materials	Brass, nickel plated	
Options	Stainless steel (add suffix SS to part no., minimum order qty's applicable) Other thread types available upon request	

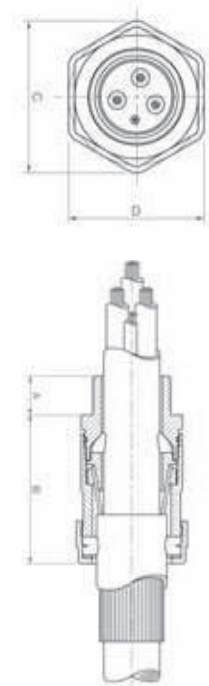

Ordering Details

Gland Size Data				Cable Range Detail					Gland Size Data			
Catalogue No.	Entry Size	Catalogue No.	Entry Size	Actual Diameter (mm)				Wire Armour Diameter (mm)	Approx (mm)		Hexagon Size (mm)	
				Under Armour		Overall			Entry Length	Projected Length	Across Flats	Across Cnrs
Cat. No.	Metric	Cat. No.	NPT	Min	Max	Min	Max	Min/Max				
TWAX16M13	16			6.3	8.6	10.2	13.2	09/1.25	14	52	23.3	26.9
TWAX1M13	20	TWAX1N13	1/2"	6.3	8.6	10.2	13.2	0.9/1.25	14	52	23.3	26.9
TWAX1M16	20	TWAX1N16	1/2"	8.4	11.6	13	15.8	0.9/1.25	14	52	30.5	35.2
TWAX1M20	20	TWAX1N20	1/2"	11	13.9	15.5	19.8	0.9/1.25	14	62	30.5	35.2
TWAX2M24	25	TWAX2N24	3/4"	13.5	16.9	19.5	23.8	1.25/1.6	16	67	33.3	38.4
TWAX2M27	25	TWAX2N27	3/4"	16.5	19.9	23.5	27.2	1.25/1.6	16	71	38.5	44.4
TWAX3M30	32	TWAX3N33	1"	19.5	23.9	27	30.5	1.6/2	20	80	42.4	48.7
TWAX3M33	32	TWAX3N43	1"	23.5	26.2	30	33.5	1.6/2	20	95	47	54.3
TWAX4M38	40	TWAX4N38	1 1/4"	25.8	31.2	33	38.5	1.6/2	20	52	57	65.8
TWAX5M43	50	TWAX5N43	1 1/2"	30.8	36.2	38	43.5	2/2.5	20	52	57	65.8
TWAX5M48	50	TWAX5N48	1 1/2"	35.5	40	43	48.5	2/2.5	20	52	63.5	73.3
TWAX5M52	50	TWAX6N52	1 1/2"	39.5	44	48	52.6	2/2.5	20	62	70	80.8
TWAX6M60	63	TWAX6N60	2"	43.5	49	52	58.9	2/2.5	22	67	76.2	87.9
TWAX6M65	63	TWAX7N765	2 1/2"	48.5	55.9	58	65.3	2/2.5	22	71	80	92.4
TWAX7M71	75	TWAX7N71	2 1/2"	55	61.9	64.3	71.6	2.5/3.15	24	80	88.9	102.6
TWAE7M78	75	TWAX8N78	3"	61	67.9	70.6	78	2.5/3.15	24	95	101	116.6