




## LCQ Metal Loadcentres

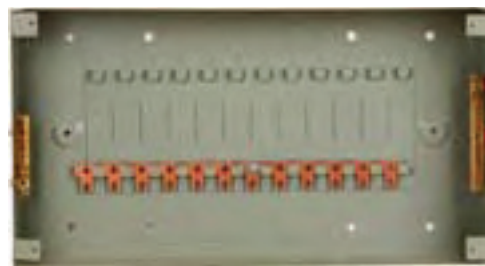

**Flush Mount LCQ Loadcentres**

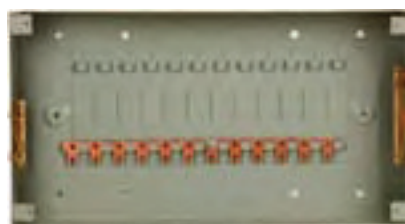

**Surface Mount LCQ Loadcentres**

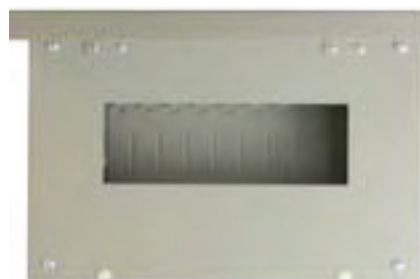

**Surface Mount LCQ Loadcentres with Door**

### Key Features

- Available in 4 to 18 poles
- Complete with active busbar, earth bar & neutral link
- Metal construction and Ripple Grey finish as standard
- Coin face key lock optional (refer LCQCLK)
- Designed to meet IP40 requirements as standard
- IP50 and IP54 requirements available on request
- Special colours available on request

### Applications:

- Industrial switchboards
- Commercial switchboards
- Equipment box
- Damp, rugged and harsh environments



*Powering Business Worldwide*

The LCQ loadcentre range is most suitable for small and compact industrial installations and is available in capacities ranging from 4 pole to 18 pole in a single row. The LCQ range is constructed from robust steel and is dimensioned so that ample space for wiring is available. The standard LCQ is supplied with 100A active link and earth bar and a neutral link that can accommodate 35mm<sup>2</sup> incoming cable. For 3 phase requirements, 12 pole and 18 pole 100A busbars are available for line side termination.

With knockouts on the top, bottom and rear, the LCQ can easily facilitate the connection of conduits and cable glands.

The LCQ metal loadcentres are available for surface or flush mounting and can be supplied either with or without a top hinged door.

The LCQ range is constructed from robust steel and is dimensioned so that ample space for wiring is available.

LCQ Metal Loadcentres			
Pole	Width x Depth x Height	Flush Mount	Surface Mount
Capacity	(mm)	Cat. No.	Cat. No.
4	233 x 70 x 234	LCQ4F	LCQ4S
6	284 x 70 x 234	LCQ6F	LCQ6S
9	360 x 70 x 234	LCQ9F	LCQ9S
12	436 x 70 x 234	LCQ12F	LCQ12S
15	512 x 70 x 234	LCQ15F	LCQ15S
18	589 x 70 x 234	LCQ18F	LCQ18S

For Ripple Orange finish add “-RO” to the end of the Cat. No.  
 Flush cover = + 50mm extra for height and depth

LCQ Metal Loadcentres with Drop Down Door			
Pole	Width x Depth x Height	Flush Mount	Surface Mount
Capacity	(mm)	Cat. No.	Cat. No.
6	284 x 70 x 234	LCQ6FD	LCQ6SD
9	360 x 70 x 234	LCQ9FD	LCQ9SD
12	436 x 70 x 234	LCQ12FD	LCQ12SD
15	512 x 70 x 234	LCQ15FD	LCQ15SD
18	589 x 70 x 234	LCQ18FD	LCQ18SD

For Ripple Orange finish add “-RO” to the end of the Cat. No.  
 Door = + 26mm extra for depth  
 Flush cover = + 50mm extra for height and depth