

Features

Triac dimmable
CCT selectable: 3000K, 4000K, 5000K
Polyamide body with latest heat dissipation technology
Opal acrylic diffuser for even lighting output
High efficiency SMD LED chips
CRI ≥ 80 and good stability over lifetime
With flex and plug
Quick and simple installation, use spring clip to fix on ceiling
IC-4 compliant
IP44 below ceiling, IP40 above



Applications

Commercial building
Boutiques
Restaurants
Bedrooms
Offices / Meeting rooms


Standards

Manufactured under ISO 9001:2015 to standards
IEC/AS/NZS 60598.1
IEC/AS/NZS 60598.2.1
IEC/AS/NZS 60598.2.2
IEC/AS/NZS CISPR 15

Mounting Methods



Recessed




Specifications

Model	DA910CTD
Nominal Power (W)	9
Input Voltage (V)	220-240
Frequency (Hz)	50 / 60
Luminous Flux (lm)	810
Efficacy (lm/W)	90
CRI (Ra)	≥80
Power Factor	>0.90
SDCM	≤5
CCT (K)	3000/4000/5000
Beam Angle (°)	90
Rated Life L70B50 (hr)	30000
Ambient Temp. ta (°C)	-20 to +35
Weight (kg)	0.20


Packaging Details

Model	DA910CTD
Product Carton Qty per box (pc)	1
Product Carton Dimension (mm)	125 x 120 x 77
Master Carton Qty per box (pc)	48
Master Carton Dimension (mm)	500 x 480 x 270

Lighting Data

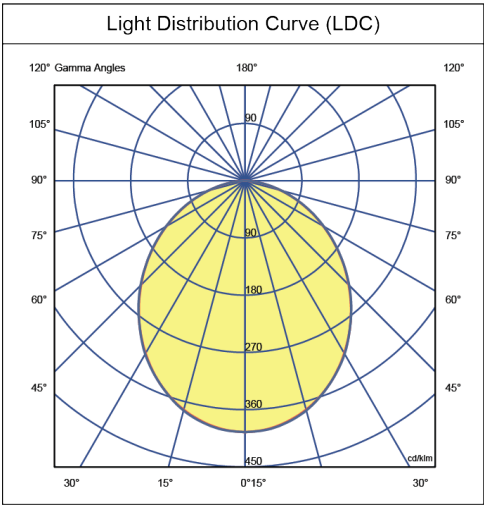

Dimensions



davislighting.com



davislighting.com.au

All photometric and electrical data published are of ±10% tolerance. Characteristics and specifications may change without notice. All electrical installations / connections should be carried out by a suitably qualified person. Application images are indicative only and may not contain actual Davis product. The information contained in this publication is typical and must not be interpreted as a guarantee of individual product performance.