



aux.contact module, 4-poles, front



Powering Business Worldwide™

Part no.  
Article no.  
Catalog No.

DILM32-XHI22  
277377  
XTCEXFCC22

## Delivery programme

Product range  
Accessories  
Description  
Function  
Pole  
Connection technique  
Rated operational current  
AC-3  
Conventional free air thermal  
current, 3 pole, 50 - 60 Hz  
Open  
at 60 °C  
AC-15  
220 V 230 V 240 V  
380 V 400 V 415 V  
Contacts  
N/O = Normally open  
N/C = Normally closed  
Mounting type  
Contact sequence

$I_{th} = I_e$


A

Accessories  
Auxiliary contact modules  
with interlocked opposing contacts  
for standard applications  
4 pole  
Screw terminals

16

4  
4

2 N/O  
2 NC  
Front fixing



For use with

DILM(C)7-10...  
DILM(C)9-10...  
DILM(C)12-10...  
DILM(C)15-10...  
DILM(C)17-10...  
DILM(C)25-10...  
DILM(C)32-10...  
DILM38-10...  
DILMP20...  
DILMP32-10...  
DILMP45-10...  
DILL...  
Interlocked opposing contacts  
according to IEC/EN 60947-5-1  
appendix L, inside the auxiliary contact  
modules, also for the integrated  
auxiliary contacts of the DILM 7 -  
DILM32  
Auxiliary contacts used as mirror  
contacts according to IEC/EN 60947-4-1  
Appendix F (not N/C late open)

## Instructions

## Approvals

Product Standards  
UL File No.  
UL Category Control No.  
CSA File No.  
CSA Class No.  
North America Certification  
Specially designed for North America

IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking  
E29184  
NKCR  
012528  
3211-03  
UL listed, CSA certified  
No

## Electrical specifications for standard auxiliary contacts

Interlocked opposing contacts within an auxiliary contact module (to IEC 60947-5-1 Annex L)  
N/C contact (not late-break contact) suitable as a mirror contact (to IEC/EN 60947-4-1 Annex F)  
Rated impulse withstand voltage

Overvoltage category/pollution degree

Rated insulation voltage

Rated operational voltage

Safe isolation to EN 61140

between coil and auxiliary contacts

between the auxiliary contacts

Rated operational current


|           |         |                |
|-----------|---------|----------------|
|           |         | Yes            |
|           |         | DILM7 - DILM38 |
| $U_{imp}$ | V<br>AC | 6000           |
|           |         | III/3          |
| $U_i$     | V<br>AC | 690            |
| $U_e$     | V<br>AC | 500            |
|           |         |                |
|           | V<br>AC | 400            |
|           | V<br>AC | 400            |
|           | A       |                |

|                                                           |                |                                                                                                                           |
|-----------------------------------------------------------|----------------|---------------------------------------------------------------------------------------------------------------------------|
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |                                                                                                                           |
| Open                                                      |                |                                                                                                                           |
| at 60 °C                                                  |                |                                                                                                                           |
| AC-15                                                     | $I_{th} = I_e$ | A 16                                                                                                                      |
| 220 V 230 V 240 V                                         | $I_e$          | A 4                                                                                                                       |
| 380 V 400 V 415 V                                         | $I_e$          | A 4                                                                                                                       |
| 500 V                                                     | $I_e$          | A 1.5                                                                                                                     |
| DC current                                                |                |                                                                                                                           |
| DC L/R 15 ms                                              |                |                                                                                                                           |
| 24 V                                                      | $I_e$          | A 10                                                                                                                      |
| 60 V                                                      | $I_e$          | A 6                                                                                                                       |
| 110 V                                                     | $I_e$          | A 3                                                                                                                       |
| 220 V                                                     | $I_e$          | A 1                                                                                                                       |
| DC-13 (6xP)                                               |                |                                                                                                                           |
| Contacts in series:                                       |                |                                                                                                                           |
| 3                                                         |                | A                                                                                                                         |
| 3                                                         | 24 V           | A 2.5                                                                                                                     |
| 3                                                         | 60 V           | A 1                                                                                                                       |
| 3                                                         | 110 V          | A 0.5                                                                                                                     |
| 3                                                         | 220 V          | A 0.25                                                                                                                    |
| Control circuit reliability                               | Failure rate   | $\lambda$ $<10^{-8}$ , < one failure at 100 million operations (at $U_e = 24$ V DC, $U_{min} = 17$ V, $I_{min} = 5.4$ mA) |
| Component lifespan                                        |                |                                                                                                                           |
| at $U_e = 230$ V, AC-15, 3 A                              | Operations     | $\times 10^6$ 1.3                                                                                                         |
| Short-circuit rating without welding                      |                |                                                                                                                           |
| max. fuse                                                 |                | A gG/gL 10                                                                                                                |


### Technical data ETIM 5.0

|                                                                                                                                                                         |   |                  |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|------------------|
| Low-voltage industrial components (EG000017) / Auxiliary contact block (EC000041)                                                                                       |   |                  |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Auxiliary switch block |   |                  |
| (ecl@ss8-27-37-13-02 [AKN342009])                                                                                                                                       |   |                  |
| Number of contacts as change-over contact                                                                                                                               |   | 0                |
| Number of contacts as normally open contact                                                                                                                             |   | 2                |
| Number of contacts as normally closed contact                                                                                                                           |   | 2                |
| Rated operation current Ie at AC-15, 230 V                                                                                                                              | A | 6                |
| Type of electric connection                                                                                                                                             |   | Screw connection |
| Mounting method                                                                                                                                                         |   | Front fastening  |

### Dimensions

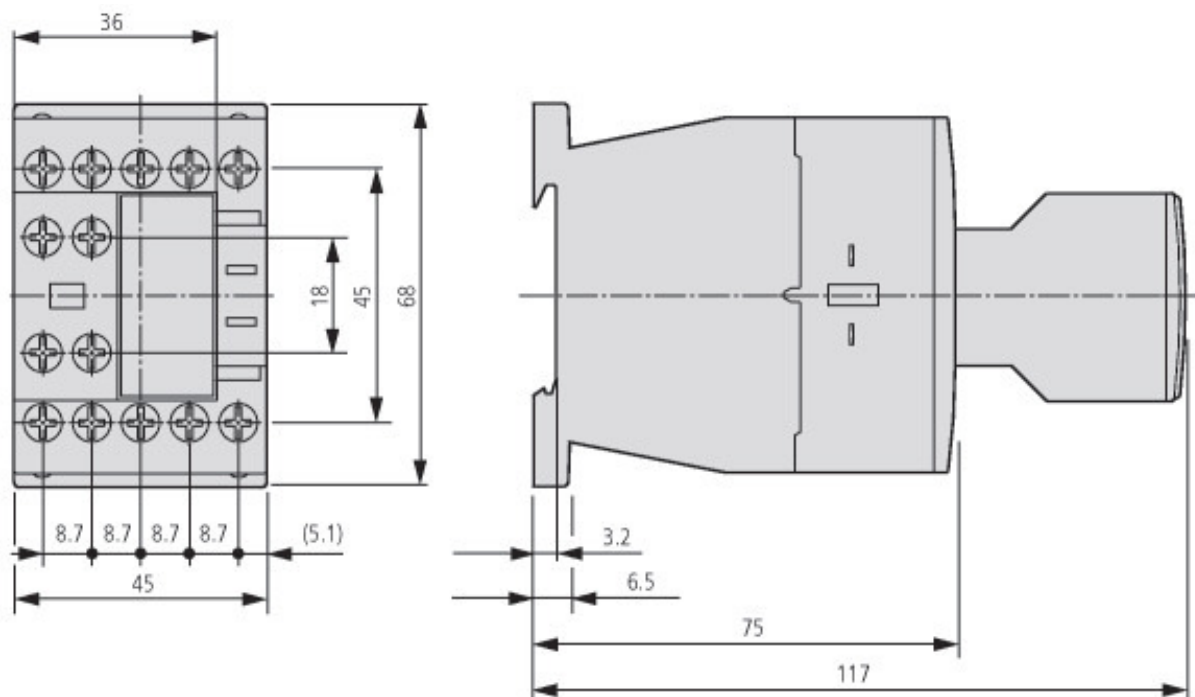

Contactor with auxiliary contact module

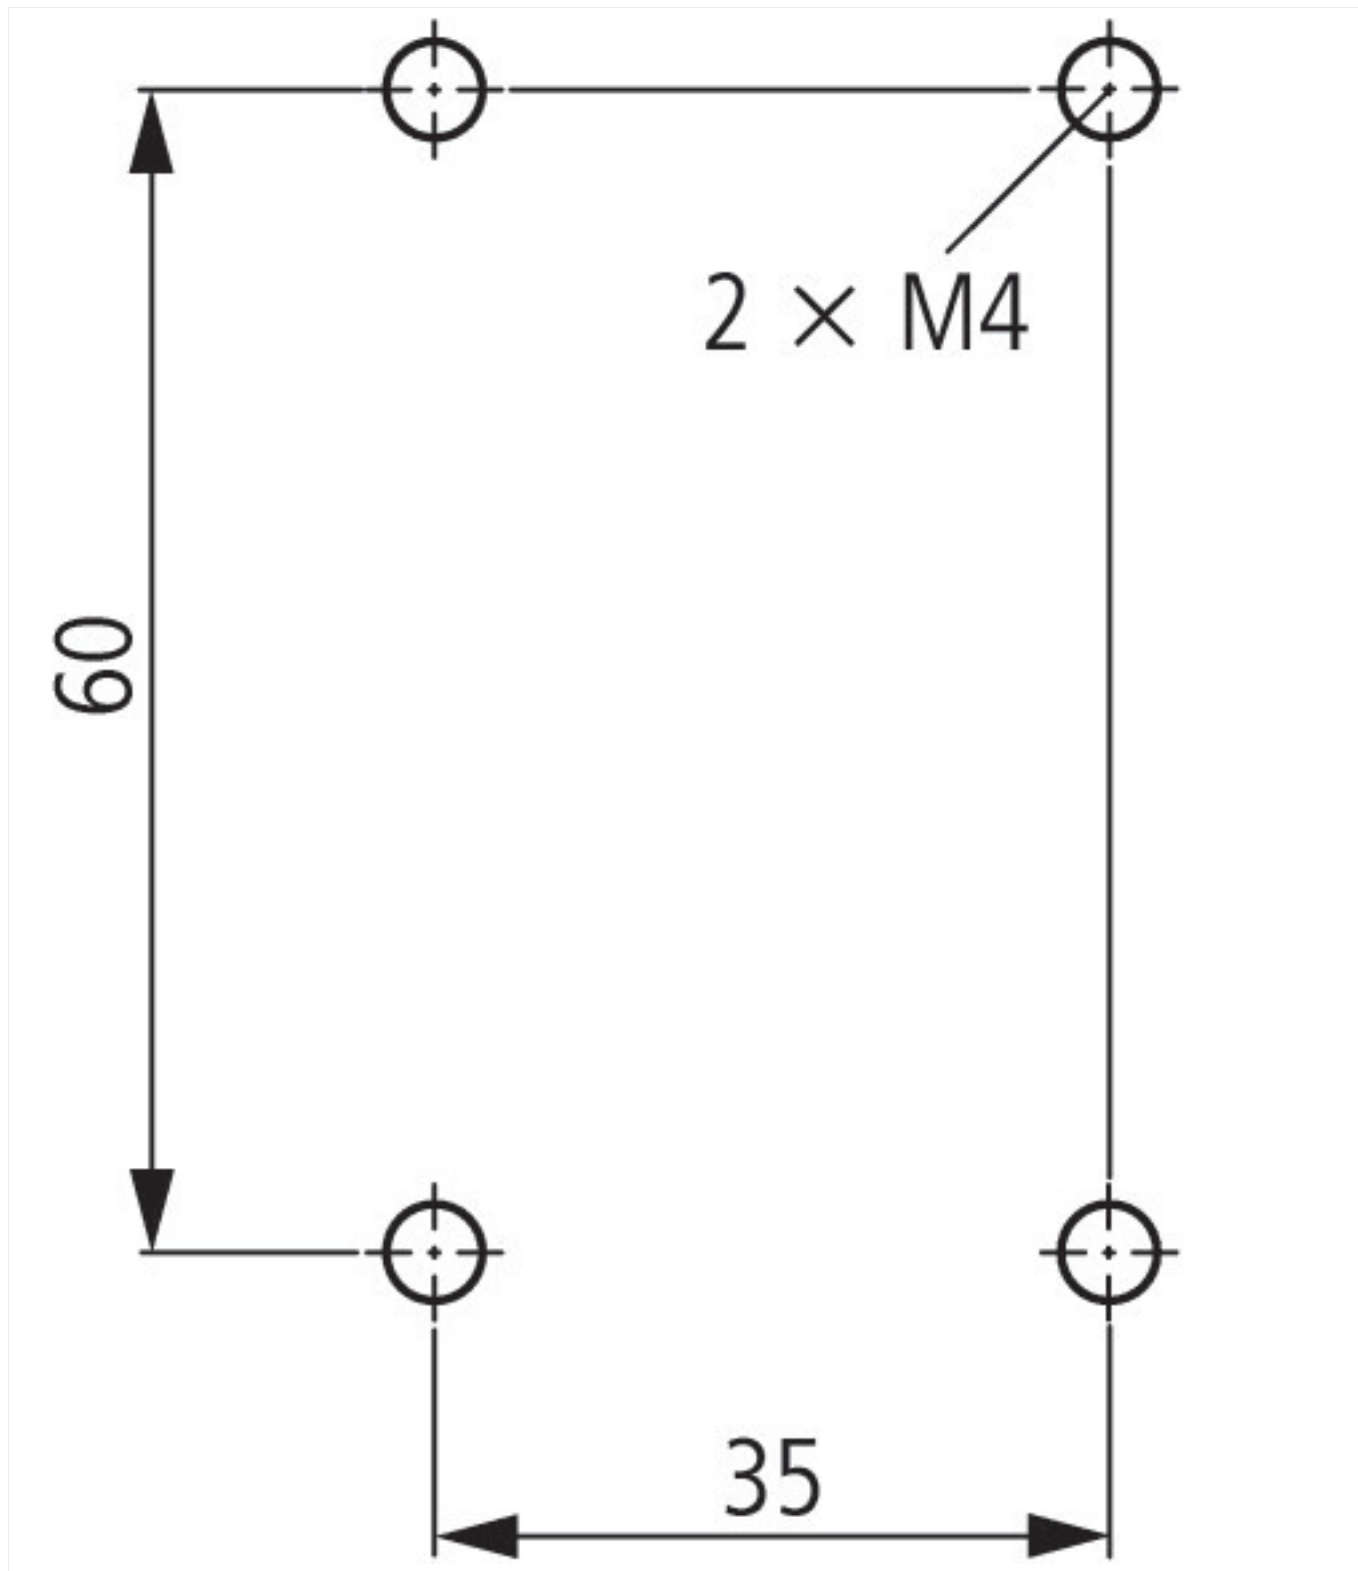

#### Additional product information (links)

|                                                                                                                                                           |                                                                                                                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>IL03407013Z (AWA2100-2126) Contactors</b>                                                                                                              |                                                                                                                                                                       |
| IL03407013Z (AWA2100-2126)<br>Contactors                                                                                                                  | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2012_03.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2012_03.pdf</a> |
| <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.84">http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.84</a> |                                                                                                                                                                       |
| Switchgear of Power Factor Correction Systems                                                                                                             | <a href="http://www.moeller.net/binary/ver_techpapers/ver934en.pdf">http://www.moeller.net/binary/ver_techpapers/ver934en.pdf</a>                                     |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely                                                                            | <a href="http://www.moeller.net/binary/ver_techpapers/ver938en.pdf">http://www.moeller.net/binary/ver_techpapers/ver938en.pdf</a>                                     |
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions                                                              | <a href="http://www.moeller.net/binary/ver_techpapers/ver944en.pdf">http://www.moeller.net/binary/ver_techpapers/ver944en.pdf</a>                                     |
| Effect of the Cabel Capacitance of Long Control Cables on the Actuation of Contactors                                                                     | <a href="http://www.moeller.net/binary/ver_techpapers/ver949en.pdf">http://www.moeller.net/binary/ver_techpapers/ver949en.pdf</a>                                     |

|                                                                                                |                                                                                                                                   |
|------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Motor starters and "Special Purpose Ratings" for the North American market                     | <a href="http://www.moeller.net/binary/ver_techpapers/ver953en.pdf">http://www.moeller.net/binary/ver_techpapers/ver953en.pdf</a> |
| Switchgear for Luminaires                                                                      | <a href="http://www.moeller.net/binary/ver_techpapers/ver955en.pdf">http://www.moeller.net/binary/ver_techpapers/ver955en.pdf</a> |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | <a href="http://www.moeller.net/binary/ver_techpapers/ver956en.pdf">http://www.moeller.net/binary/ver_techpapers/ver956en.pdf</a> |
| The Interaction of Contactors with PLCs                                                        | <a href="http://www.moeller.net/binary/ver_techpapers/ver957en.pdf">http://www.moeller.net/binary/ver_techpapers/ver957en.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels                                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a> |