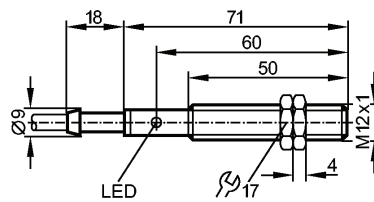


IF5597

IF-2004-FRKG/PH

Inductive sensors


Product characteristics

Inductive sensor

Plastic thread M12 x 1

Cable

Sensing range 4 mm; [nf] non-flush mountable

Electrical data

Electrical design	DC PNP/NPN
Operating voltage [V]	10...55 DC
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	normally open / closed programmable
Voltage drop [V]	< 4.6
Minimum load current [mA]	4
Leakage current [mA]	< 0.5
Current rating [mA]	400
Short-circuit protection	pulsed
Overload protection	yes
Switching frequency [Hz]	1500

Range

Sensing range [mm]	4
Real sensing range (Sr) [mm]	4 ± 10 %
Operating distance [mm]	0...3.25

Accuracy / deviations

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / Al approx. 0.3 / Cu approx. 0.2
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10

Environment

Ambient temperature [°C]	-25...80
Protection	IP 67

Tests / approvals

EMC	EN 60947-5-2
MTTF [Years]	1815

Mechanical data

Mounting	non-flush mountable
Housing materials	PBT
Weight [kg]	0.08

IF5597

IF-2004-FRKG/PH

Inductive sensors

Displays / operating elements

Output status indication	LED	yellow
--------------------------	-----	--------

Electrical connection

Connection	PUR / PVC cable / 2 m; 2 x 0.34 mm ²
------------	---

Wiring

Core colours

BK black

WH white



Accessories

Accessories (included)	2 lock nuts
------------------------	-------------

Remarks

Pack quantity	[piece]	1
---------------	---------	---