


**IG0011**

IGA2005-ABOA

Inductive sensors

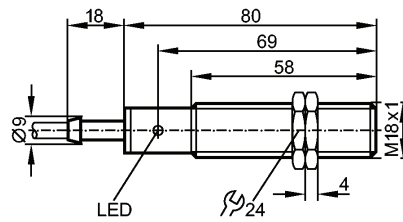

**Product characteristics**

Inductive sensor	
Metal thread M18 x 1	
Cable	
Sensing range 5 mm; [f] flush mountable	

**Electrical data**

Electrical design	AC/DC
Operating voltage [V]	20...250 AC/DC
Protection class	II
Reverse polarity protection	no

**Outputs**

Output function	normally open
Voltage drop [V]	< 6.5 AC / < 6 DC
Minimum load current [mA]	5
Leakage current [mA]	< 2.5 (250 V AC) / < 1.3 (110 V AC) / < 0.8 (24 V DC)

<b>Current rating</b>	
- Current rating (continuous) [mA]	250 AC / 100 DC; 350 AC (...50 °C)
- Current rating (peak) [mA]	î: 2.2 A (20 ms / 0.5 Hz)
Short-circuit proof	no
Overload protection	no
Switching frequency [Hz]	25 AC / 50 DC

**Range**

Sensing range [mm]	5
Real sensing range (Sr) [mm]	5 ± 10 %
Operating distance [mm]	0...4.05

**Accuracy / deviations**

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / Al approx. 0.3 / Cu approx. 0.2
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10

**Environment**

Ambient temperature [°C]	-25...80
Protection	IP 67

**Tests / approvals**

EMC	EN 60947-5-2 EN 55011: class B
MTTF [Years]	609

**Mechanical data**

**IG0011**

IGA2005-ABOA

**Inductive sensors**

Mounting	flush mountable
Housing materials	Brass white bronze coated; active face: PC (polycarbonate)
Weight [kg]	0.146

**Displays / operating elements**


Output status indication	LED	yellow
--------------------------	-----	--------

**Electrical connection**

Connection	PVC cable / 2 m; 2 x 0.5 mm <sup>2</sup>
------------	--

**Wiring**

Core colours  
 BN brown  
 BU blue



Note: miniature fuse to IEC60127-2 sheet 1, ≤ 2 A (fast acting)

**Accessories**

Accessories (included)	2 lock nuts
------------------------	-------------

**Remarks**

Remarks	Recommendation: check the unit for reliable function after a short circuit.
---------	---

Pack quantity [piece]	1
-----------------------	---