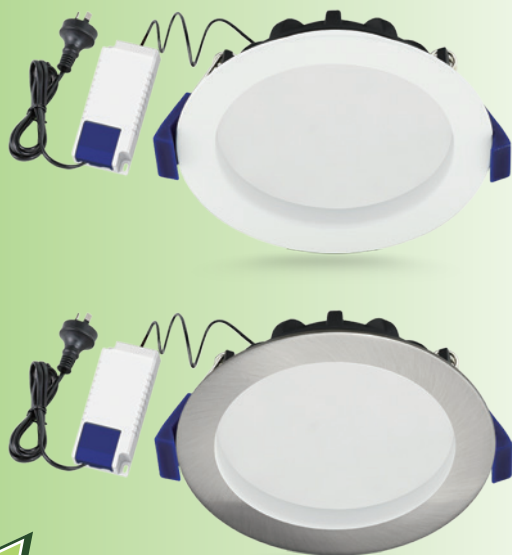


- High performance, economy recessed metal downlight.



New!

FEATURES

- Aluminium heat sink
- High efficiency SMD chips
- Constant current driver
- Highly transparent opal polycarbonate diffuser
- IC-F and IC-4 rating. May be installed under ceiling insulation

DIMMING OPTIONS

- Trailing and Leading Edge
- Universal

INCLUDES




- Fixed head LED downlight
- Dimmable LED driver
- 1.2 m flex and plug

APPLICATIONS

- Residential
- Hotels and shops
- Conference rooms
- Reception areas
- Bathrooms and wet areas

WARRANTY

- Five years (subject to terms and conditions)

CERTIFICATION			IP RATING	DIMMABLE	DISTRIBUTION	DIMENSIONS(mm)
				 leading and trailing edge		

Part No.	Voltage	Watt.	PF	CCT.	Ra	Lumen	Beam Angle	Lifetime L70B50	Fitting Colour
172001C	220-240V	11W	0.9	3000K	≥80	850lm	110°	35000h	White
172002C	220-240V	11W	0.9	4000K	≥80	900lm	110°	35000h	White
172074C	220-240V	11W	0.9	5000K	≥80	900lm	110°	35000h	White
172013C	220-240V	11W	0.9	3000K	≥80	850lm	110°	35000h	Satin Chrome
172014C	220-240V	11W	0.9	4000K	≥80	900lm	110°	35000h	Satin Chrome
172076C	220-240V	11W	0.9	5000K	≥80	900lm	110°	35000h	Satin Chrome

Part No.	Model No.	Driver Model No.	VEET Status	IPART Status
172001C	YKRS3G1B-D A1-WT	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ
172002C	YKRS3G1B-D A1-WT	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ
172074C	YKRS3G1B-D A1-WT	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ
172013C	YKRS3G1B-D A1-BN	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ
172014C	YKRS3G1B-D A1-BN	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ
172076C	YKRS3G1B-D A1-BN	YKD12CC270D	Approved VEET No.: 4923	Approved IPART No.: 24143S15-KGA3EBQ

[1] Operating Frequency=50/60Hz; [2] Switch Times≥20000;

[3] This fitting is IP54 only once installed; [4] For dimming compatibility please see page 85