


- High efficiency, low UGR LED panel.

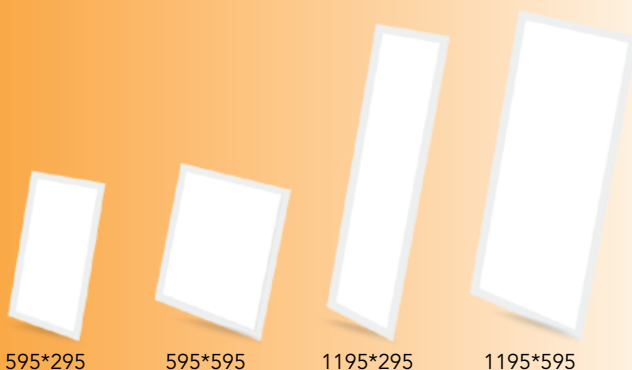

FEATURES

- Super slim design
- Extruded aluminium frame
- Powder coated finish
- Prismatic diffuser
- Edge lit
- UGR < 19
- Low colour temperature variance: SDCM ≤ 4

INCLUDES

- High efficiency LED panel light
- Constant current LED driver
- 1.2 m flex and plug

INSTALLATION OPTIONS

- Standard metric T-bar ceiling recessed installation
- Suspended (Suspension kit is required)
- Recessed plaster ceiling installation (Plaster frame is required)
- Surface mounting installation (Surfaced mounted frame is required)

APPLICATIONS

- Offices and conference rooms
- Schools and retail

WARRANTY

- Five years (subject to terms and conditions)

CERTIFICATION	IP RATING	DIMMABLE	SDCM	Ra	DISTRIBUTION	DIMENSIONS(mm)

Part No.	Order Code	Voltage	Watt.	PF	Color Temp.	Lumens	Beam Angle	Lifetime L70B50	Size(L*W*H)mm	Net Weight (kg)
223334	223334	220-240V	17W	0.9	4000K	1600lm	90°	50000h	595*295*13	1.16
223335	223335	220-240V	17W	0.9	5000K	1600lm	90°	50000h	595*295*13	1.16
223336	223336	220-240V	17W	0.9	6500K	1600lm	90°	50000h	595*295*13	1.16
223344	223344	220-240V	32W	0.9	4000K	3400lm	90°	50000h	595*595*13	1.95
223345	223345	220-240V	32W	0.9	5000K	3400lm	90°	50000h	595*595*13	1.95
223346	223346	220-240V	32W	0.9	6500K	3400lm	90°	50000h	595*595*13	1.95
223354	223354	220-240V	32W	0.9	4000K	3400lm	90°	50000h	1195*295*13	2.12
223355	223355	220-240V	32W	0.9	5000K	3400lm	90°	50000h	1195*295*13	2.12
223356	223356	220-240V	32W	0.9	6500K	3400lm	90°	50000h	1195*295*13	2.12
223364	223364	220-240V	50W	0.9	4000K	5000lm	90°	50000h	1195*595*15	4.62
223365	223365	220-240V	50W	0.9	5000K	5000lm	90°	50000h	1195*595*15	4.62
223366	223366	220-240V	50W	0.9	6500K	5000lm	90°	50000h	1195*595*15	4.62

[1] Operating Frequency=50/60Hz;

[2] Operating Temperature:-20 °C ~ +40 °C ;

[3] Triac dimmable, 0-10V dimmable, DALI dimmable and flicker-free options are available on request