

# Recessed+

Quality Design for **Food Processing** Applications





10Kg



IP66

CLASS1




## Recessed+


### Specifications

- Luminous flux 18,000lm (150W)
- Efficacy up to 120lm/W
- Electrical: 220-240VAC, 50Hz, PF≥0.95
- Maximum Current: AC 1.67A (max)
- LED Lifespan >50,000 hours (Ta=25°C @ L70)
- CCT: 5,000K
- CRI > Ra70 (80 optional upon request)
- Beam angle: 120°
- Frosted PC cover: Safe for food processing applications
- Operating temp: -40~+50°C
- Body: Anodized aluminium
- Stainless steel screws
- IP66 protection rating
- Weight: 10kg
- Super slim design
- Dimming option (extra)
- Supplied with 1m flex plug

### Photometric



### Measurements (mm)

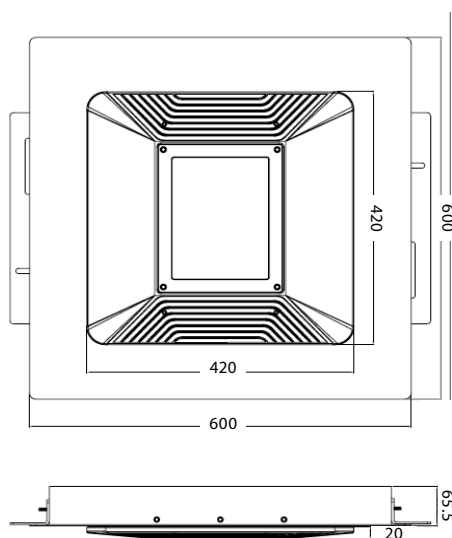

### Product Range

Code	Description	Exit (lm)	LED	Distribution
181530	SM Plus - Recessed+ (600x600) 150W 120° 5,000K IP66	18,000	150W	120°

*Pictorial is representative only. Specifications may change without notice.*