

Catalogue No: **60.12 240 V AC RLY**

GP RELAY 10A 2CO 240VAC COIL W/PB+MI

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > Power Relays > 60 Series Square Base Relays



Representative Photo Only
(actual product may vary based on configuration selections)

GP Relay 10A 2 C/O 240V AC Coil w/Pb+Mi

- Complete range from PCB to power relays to cover all of your switching requirements
- International certifications and approvals including CE, CSA, EAC, PCT, RINA, VDE and RoHS, providing quality assurance of a market leading product
- Compact construction allowing for most efficient use of your space

SPECIFICATIONS

Component Type	Timers and Control relays	Relay
Contact Configuration		2 CO
In, Rated Current		10 A
Icw, Short Time Withstand Current, 10ms (rms)		20 A, 10ms
Un, Nominal Operational Voltage, AC		250 V AC
Ue, Rated Operational Voltage, AC, max		400 V AC
Contact Breaking Capacity, DC1, 30V		10 A
Contact Breaking Capacity, DC1, 110V		0.4 A
Contact Breaking Capacity, DC1, 220V		0.15 A
Rated Load, AC-1		2500 VA
Rated Load, AC-15		500 VA
Contact Rated Power, Single Phase Motor, 230V AC		0.37 kW
Coil Type		AC
Coil Voltage, AC, Nom		240 V AC
Coil Voltage, AC, Min		192 V AC
Coil Voltage, AC, Max		264 V AC
Material, Contacts		Silver Nickel (AgNi) material
Mechanical service life		20000000 cycles
Electrical Service Life at Un, In		200000 cycles
Total Making Time		11 ms
Total Breaking Time		4 ms
Insulation Voltage, between Coil & Contacts		4000 V
Dielectric Strength, between open Contacts		1000 V AC
Mounting		Plug-in
Operating Temperature, min		-40 °C min
Operating Temperature, Max		70 °C max
Height		66.8 mm

Catalogue No: **60.12 240 V AC RLY**


GP RELAY 10A 2CO 240VAC COIL W/PB+MI

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > Power Relays > 60 Series Square Base Relays



Width	36.4 mm
Depth	32.5 mm
Shock Acceleration (Max.)	20 g
Shock Duration (Max.)	4 ms
Vibration Acceleration (Max.)	22 g
Vibration Frequency, Operational (Max.)	55 Hz
Certifications	CE CCC CSA EAC GOST-R IMQ VDE C-UR-US
Shipping Approvals	Lloyd's Register of Shipping RINA (Registro Italiano Navale)

REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

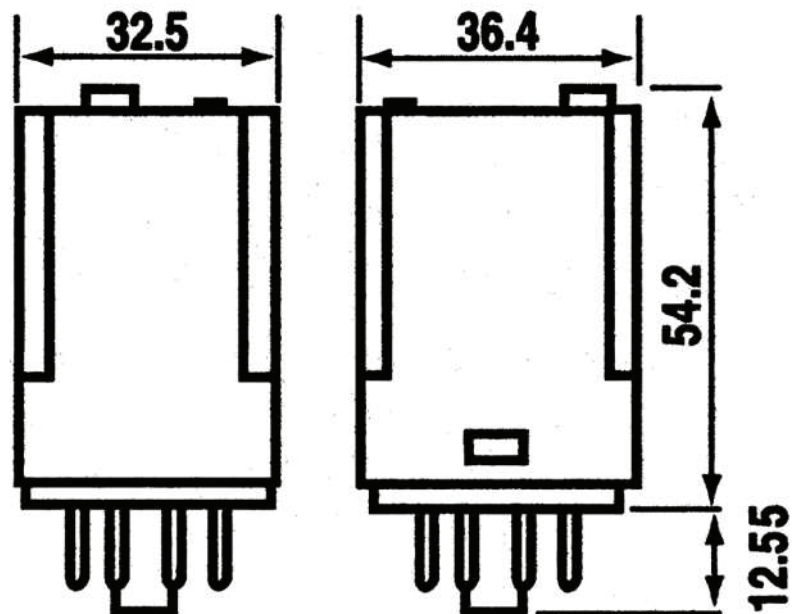


Catalogue No: **60.12 240 V AC RLY**

GP RELAY 10A 2CO 240VAC COIL W/PB+MI

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > Power Relays > 60 Series Square Base Relays



Dimension Diagram

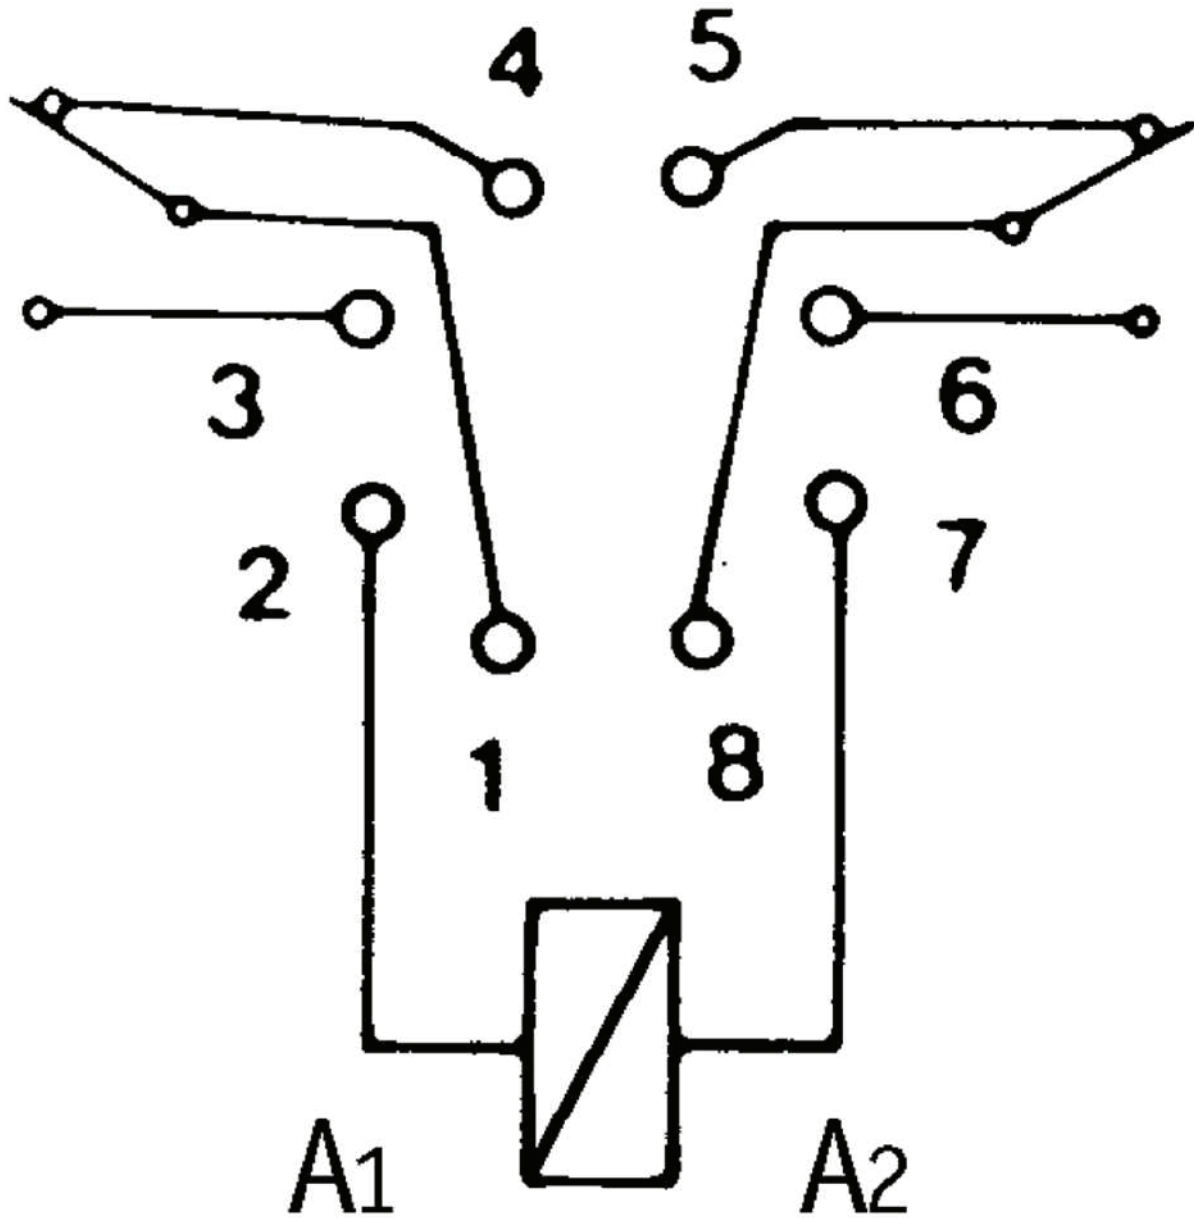

Connection / Wiring Diagram