

Catalogue No: **60.13 24 V AC RLY**

GP RELAY 10A 3CO 24VAC COIL W/PB+MI

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > Power Relays > 60 Series Square Base Relays



Representative Photo Only
(actual product may vary based on configuration selections)

GP Relay 10A 3 C/O 24V AC Coil w/Pb+Mi

- Complete range from PCB to power relays to cover all of your switching requirements
- International certifications and approvals including CE, CSA, EAC, PCT, RINA, VDE and RoHS, providing quality assurance of a market leading product
- Compact construction allowing for most efficient use of your space

SPECIFICATIONS

Component Type Timers and Control relays	Relay
Contact Configuration	3 CO
In, Rated Current	10 A
Icw, Short Time Withstand Current, 10ms (rms)	20 A, 10ms
Un, Nominal Operational Voltage, AC	250 V AC
Ue, Rated Operational Voltage, AC, max	400 V AC
Contact Breaking Capacity, DC1, 30V	10 A
Contact Breaking Capacity, DC1, 110V	0.4 A
Contact Breaking Capacity, DC1, 220V	0.15 A
Rated Load, AC-1	2500 VA
Rated Load, AC-15	500 VA
Contact Rated Power, Single Phase Motor, 230V AC	0.37 kW
Coil Type	AC
Coil Voltage, AC, Nom	24 V AC
Coil Voltage, AC, Min	19.2 V AC
Coil Voltage, AC, Max	26.4 V AC
Material, Contacts	Silver Nickel (AgNi) material
Mechanical service life	20000000 cycles
Electrical Service Life at Un, In	200000 cycles
Total Making Time	11 ms
Total Breaking Time	4 ms
Insulation Voltage, between Coil & Contacts	4000 V
Dielectric Strength, between open Contacts	1000 V AC
Mounting	Plug-in
Operating Temperature, min	-40 °C min
Operating Temperature, Max	70 °C max
Height	66.8 mm

Catalogue No: **60.13 24 V AC RLY**


GP RELAY 10A 3CO 24VAC COIL W/PB+MI

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > Power Relays > 60 Series Square Base Relays



Width	36.4 mm
Depth	32.5 mm
Shock Acceleration (Max.)	20 g
Shock Duration (Max.)	4 ms
Vibration Acceleration (Max.)	22 g
Vibration Frequency, Operational (Max.)	55 Hz
Certifications	CE CCC CSA EAC GOST-R IMQ VDE C-UR-US
Shipping Approvals	Lloyd's Register of Shipping RINA (Registro Italiano Navale)

REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

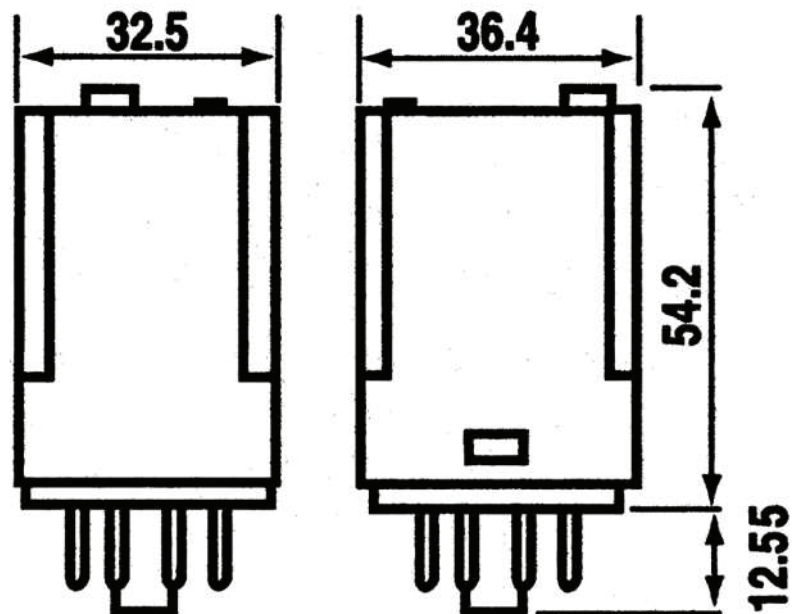


Catalogue No: **60.13 24 V AC RLY**

GP RELAY 10A 3CO 24VAC COIL W/PB+MI

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > Power Relays > 60 Series Square Base Relays



Dimension Diagram

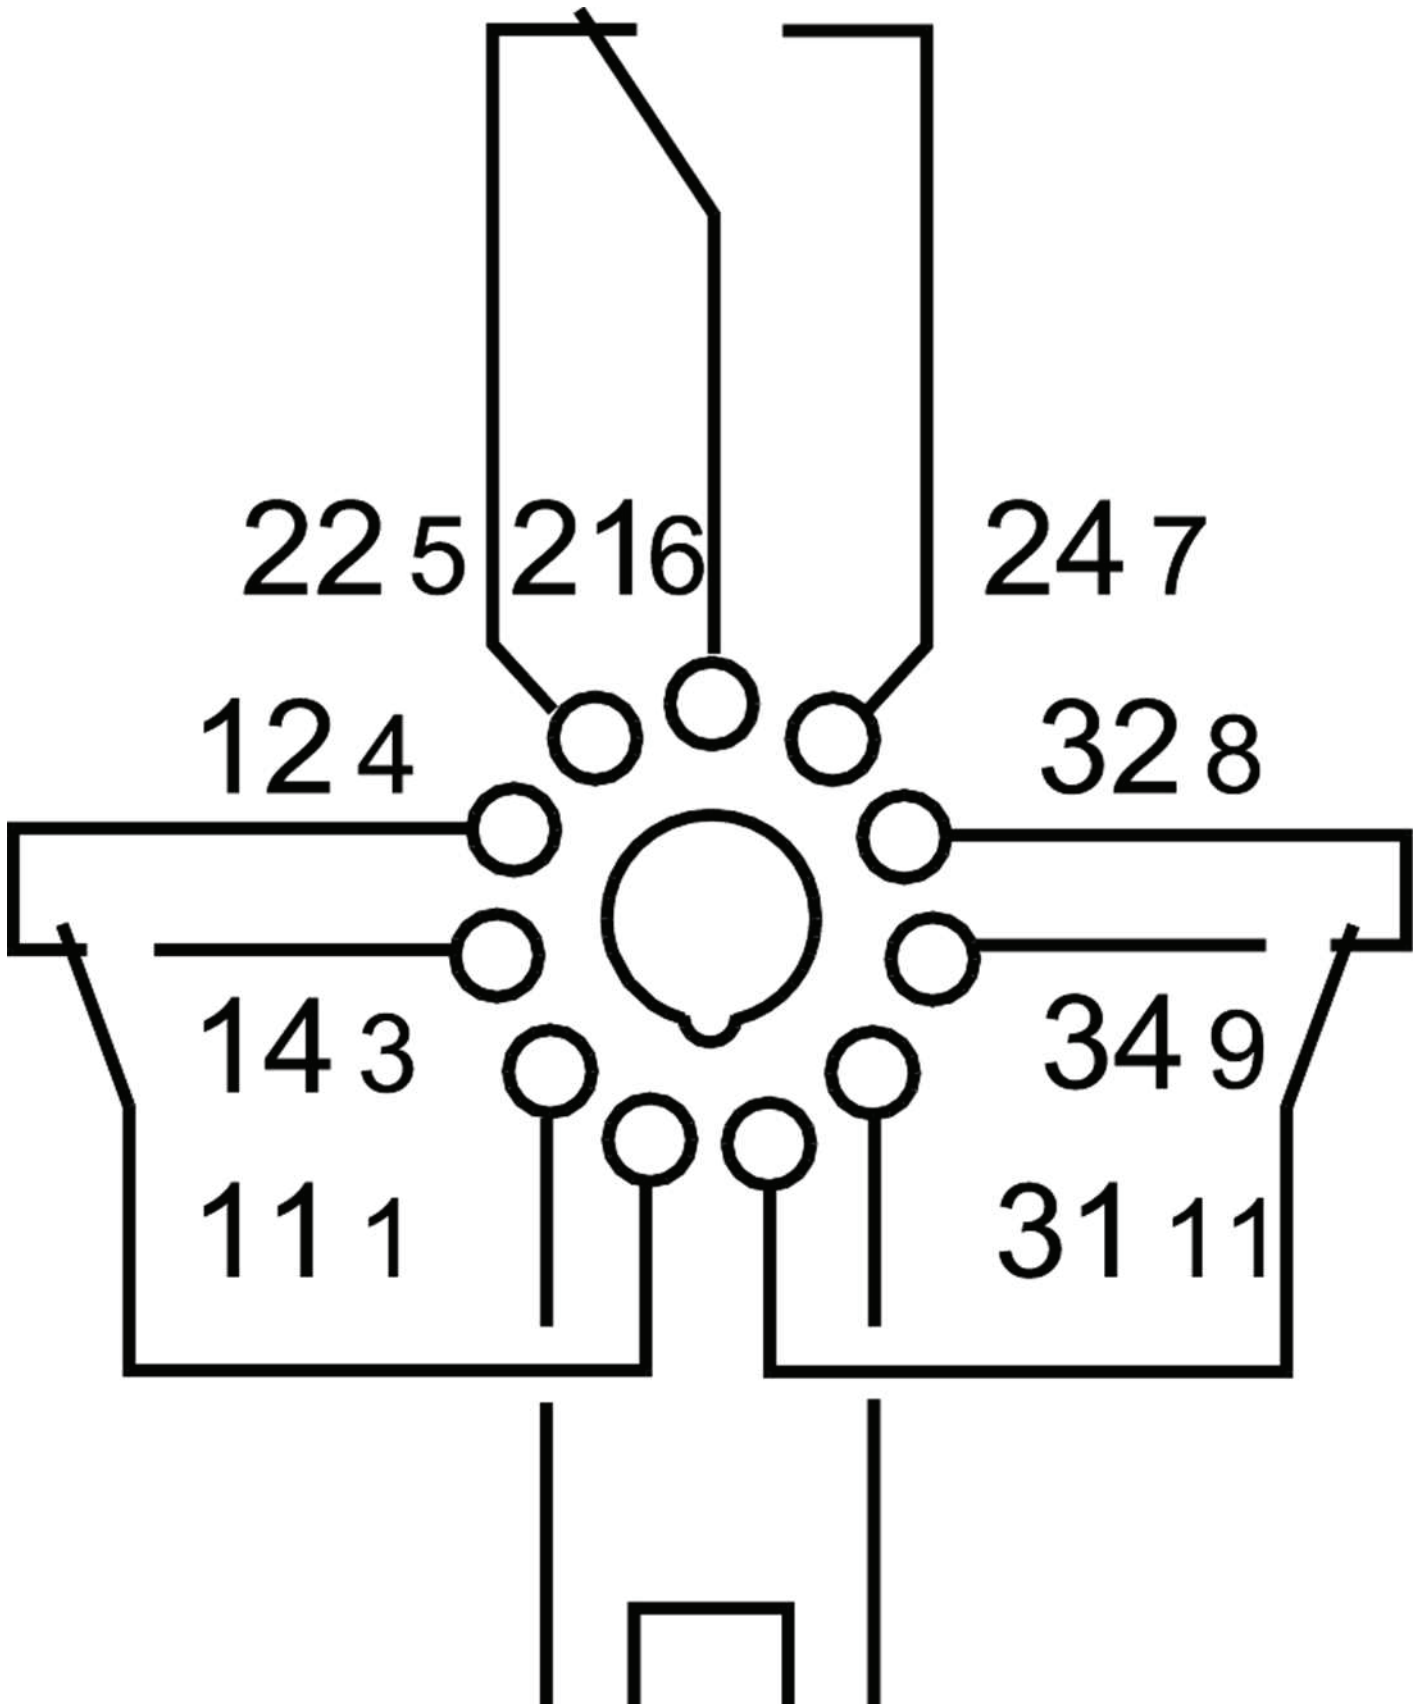

Catalogue No: **60.13 24 V AC RLY**

GP RELAY 10A 3CO 24VAC COIL W/PB+MI

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > Power Relays > 60 Series Square Base Relays

