


Separate Relay Base 345124V DC

- Complete range from PCB to power relays to cover all of your switching requirements
- Certifications and approvals including CE, EAC, PCT, RINA, VDE and RoHS, providing quality assurance of a market leading product.
- Compact construction allowing for most efficient use of space

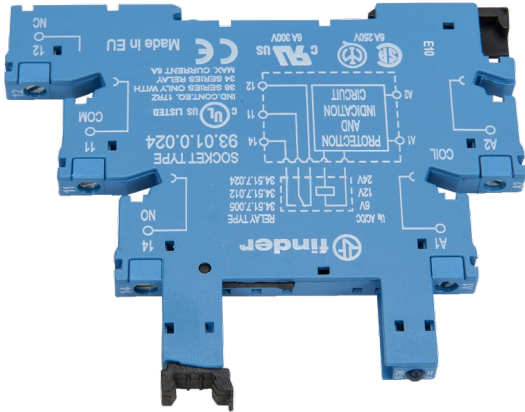

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Component Type	Timers and Control relays	Relay Base
Un, Nominal Operational Voltage, AC	24 V AC	
Un, Nominal Operational Voltage, DC	24 V DC	
Coil Type	AC/DC	
Coil Voltage, AC, Nom	250 V AC	
Mounting	DIN-35 Rail Mount	
Operating Temperature, Min	-40 °C min	
Operating Temperature, Max	55 °C max	
Height	87.9 mm	
Width	6.2 mm	
Depth	75.6 mm	
Certifications	CSA VDE	

REFERENCES

IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-