

Jumper Link For 9575/9585 Bases 8 Way

- Complete range from PCB to power relays to cover all of your switching requirements
- International certifications and approvals including CE, CSA, EAC, PCT, RINA, VDE and RoHS, providing quality assurance of a market leading product
- Compact construction allowing for most efficient use of your space

Representative Photo Only
(actual product may vary based on configuration selections)


SPECIFICATIONS	
Component Type	Timers and Control relays
	Jumper
Dielectric Strength, between open Contacts	1000 V AC
Mounting	PCB Mount
Shock Acceleration (Max.)	20 g
Shock Duration (Max.)	5 ms
Vibration Acceleration (Max.)	25 g

REFERENCES	
IECEEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **95.08**

JUMPER LINK FOR 9575/9585 BASES 8 WAY

Timers and Control Relays > General Purpose Relays > Electromechanical Relays > Finder Electromechanical Relays > PCB and Miniature Relays > 40/44 Series Miniature PCB Relays

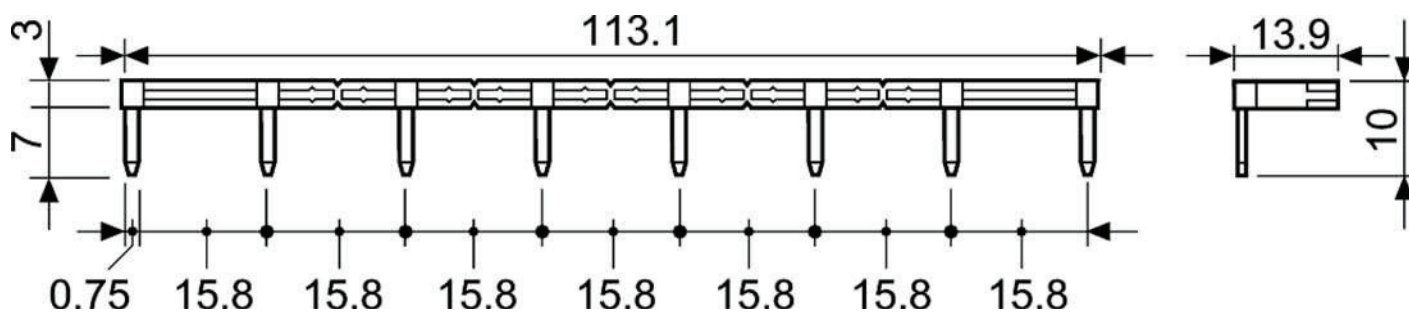

Dimension Diagram