


Bolt-In Centre Tag

TBC
TC
TF
TKF
TMF

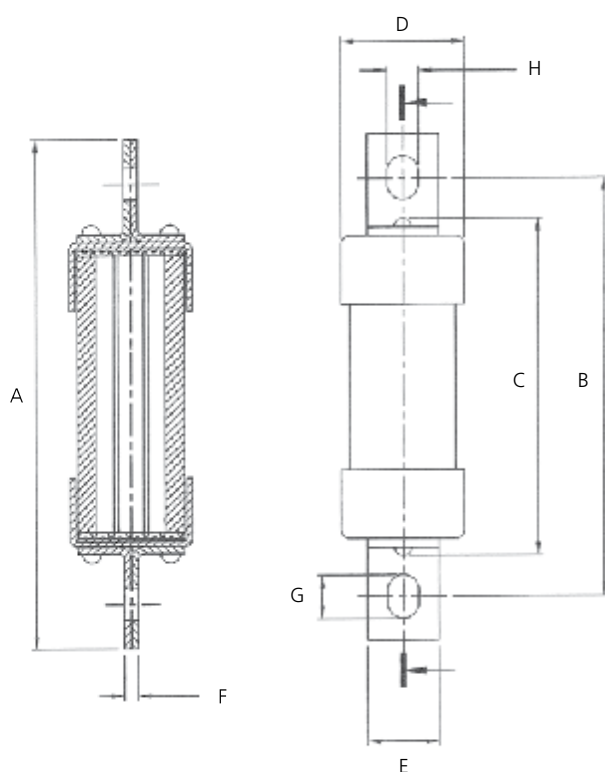

Type gG for cable and line protection
Type gM for motor protection

Standards: BS88: Part 6; IEC 60269-2

FUSECO PART NUMBER	AMP RATING	VOLTAGE RATING	UTILISATION CATEGORY	BREAKING CAPACITY AT RATED VOLTAGE
TBC2	2A	415V	gG	80 kA
TBC4	4A	415V	gG	80 kA
TBC6	6A	415V	gG	80 kA
TBC10	10A	415V	gG	80 kA
TBC16	16A	415V	gG	80 kA
TBC20	20A	415V	gG	80 kA
TBC25	25A	415V	gG	80 kA
TBC32	32A	415V	gG	80 kA
TBC35	35A	415V	gG	80 kA
TBC40	40A	415V	gG	80 kA
TBC50	50A	500V	gG	80 kA
TBC63	63A	500V	gG	80 kA
TBC63M80	63M80A	415V	gM	80 kA
TBC63M100	63M100A	415V	gM	80 kA
TC80	80A	500V	gG	80 kA
TC100	100A	500V	gG	80 kA
TC 100M125	100M125A	415V	gM	80 kA
TC 100M160	100M160A	415V	gM	80 kA
TC 100M200	100M200A	415V	gM	80 kA
TF125	125A	500V	gG	80 kA
TF160	160A	500V	gG	80 kA
TF200	200A	500V	gG	80 kA
TF200M250	200M250A	415V	gM	80 kA
TF200M315	200M315A	415V	gM	80 kA
TKF250	250A	500V	gG	80 kA
TKF315	315A	500V	gG	80 kA
TKF315M355	315M355A	415V	gM	80 kA
TKF315M400	315M400A	415V	gM	80 kA
TMF355	355A	500V	gG	80 kA
TMF400	400A	500V	gG	80 kA
TMF400M450	400M450A	415V	gM	80 kA
TMF400M500	400M500A	415V	gM	80 kA

Dimensions

	CATEGORY	BRAND	A	B	C	D	E	F	G	H
			Overall Length	Fixing Centre	Body Length	Body Diameter	Tag Width	Tag Thickness	Hole Length	Hole Width
TBC2-40	as B1	Lawson	137.0	111.0	45.0	22.0	15.0	1.4	14.0	8.7
TBC50-63	as B1	FuseMaster	135.5	111.0	65.0	31.8	17.0	3.2	11.0	8.7
TBC63M	as B1	Lawson	137.0	111.0	45.0	26.0	20.0	3.2	14.0	8.7
TC80-100	B1	FuseMaster	135.5	111.0	65.0	31.8	17.0	3.2	11.0	8.7
TC100M	B1	Lawson	137.0	111.0	45.0	35.0	20.0	3.2	14.0	8.7
TF125-200	B2	FuseMaster	131.5	111.0	72.0	39.5	19.0	3.2	11.0	8.7
TF200M	B2	Lawson	137.0	111.0	45.0	41.0	20.0	3.2	14.0	8.7
TKF250-315	B3	FuseMaster	135.5	111.0	70.0	50.5	25.4	3.2	11.0	8.7
TKF315M	B3	Lawson	137.0	111.0	45.0	51.0	26.0	6.4	14.0	8.7
TMF355-400	B4	FuseMaster	136.5	111.0	72.0	50.5	25.4	5.3	11.0	8.7
TMF400M	B4	Lawson	137.0	111.0	52.0	61.0	26.0	6.4	16.0	8.7