

**Straight Plug**

- BUP310OR**
- BUP315OR**
- BUP320OR**
- BUP332OR**
- BUP410OR**
- BUP420OR**
- BUP432OR**
- BUP510OR**
- BUP520OR**
- BUP532OR**

**Angle Plug**


- BUPA310OR**
- BUPA315OR**
- BUPA320OR**
- BUPA332OR**
- BUPA410OR**
- BUPA420OR**
- BUPA432OR**
- BUPA510OR**
- BUPA520OR**
- BUPA532OR**

## Straight & Angled Plugs

Buffalo offers an extensive range of Industrial Plugs, three pin up to 32A, and four and five pins up to 50A. Angled Plugs are also available in ratings other than 3 pin 10A and 15A. See the table for product detail.



Pin & Volt	Cat No. Straight Plug	Cat No. Angle Plug	Current Rating (A)	Pin Config	Pin Config Code (Table 1)	Terminal Size (mm dia)	Maximum Conductor Size (mm <sup>2</sup> )	Minimum Cable Diameter (mm <sup>2</sup> )	Maximum Cable Diameter (mm <sup>2</sup> )	Gland Nut Thread (mm)	Matching Socket/Combination
3 Pin 250V~	BUP310OR	BUPA310OR	10	3 Flat	A	clamp type	2.5	7	12.5	M20 x 1.5	BUPP310/BUC310
	BUP315OR	BUPA315OR	15	3 Flat	B	clamp type	2.5	7	12.5	M20 x 1.5	BUPP315/BUC315
3 Pin 500V~	BUP320OR	BUPA320OR	20	3 Round	C	4.1	10	7	16	M25 x 1.5	BUPP320/BUC320
	BUP332OR	BUPA332OR	32	3 Round	D	4.1	10	7	16	M25 x 1.5	BUPP332/BUC332
4 Pin 500V~	BUP410OR	BUPA410OR	10	4 Round	E	4.1	10	7	16	M25 x 1.5	BUPP410/BUC410
	BUP420OR	BUPA420OR	20	4 Round	F	4.1	10	7	16	M25 x 1.5	BUPP420/BUC420
	BUP432OR	BUPA432OR	32	4 Round	G	4.1	10	9	28	M32 x 1.5	BUPP432/BUC332
5 Pin 500V~	BUP510OR	BUPA510OR	10	5 Round	J	4.1	10	7	16	M25 x 1.5	BUPP510/BUC510
	BUP520OR	BUPA520OR	20	5 Round	K	4.1	10	7	16	M25 x 1.5	BUPP520/BUC520
	BUP532OR	BUPA532OR	32	5 Round	L	4.1	10	9	28	M32 x 1.5	BUPP532/ BUC532

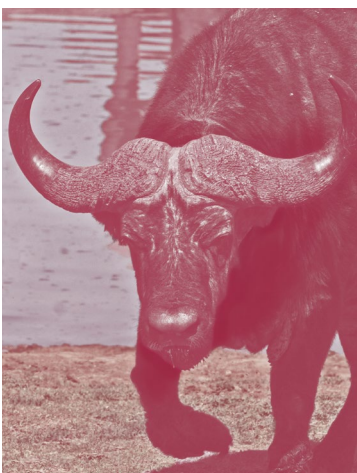

**Certification Number:**  
GMA-502565

**GSM Electrical (Australia) Pty Ltd**

Level 2, 142-144 Fullarton Road, Rose Park SA 5067  
P: 1300 301 838 F: 1300 301 778 E: service@gsm.com.au  
[www.gsm.com.au](http://www.gsm.com.au)

