

Garland's Pro Series range is the experts' choice for high quality cables.

Figure 8 Cable


Part No: TCW24WHBK500HF

Description	Stranded 19AWG (24/0.2mm) PACW, Figure 8 construction, LSHF Insulation.
Applicable Standards	AS/CA S-008, AS 1049
Suitable Applications	For the wiring of electronic and allied equipment, extension speakers, security system etc.

Cable Construction Drawing



Cable Construction Relative Parts

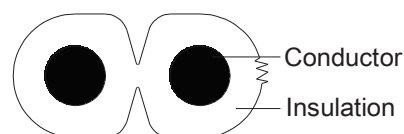

Cable Description

Conductor	AWG	Stranding	Area(mm ²)	Diameter(mm)	Material
	19	24/0.2	0.75	1.13	PACW
Insulation	Cores : 2 Material : LSHF Colour : White/Black Strip Nominal Thickness (mm) : 0.75 Nominal OD (mm) : 2.7 x 5.4				

Electrical Properties

Voltage Rating	ELV
Max. Conductor DC Resistance @ 20°C	27.5Ω/km
Min. Insulation Resistance @ 20°C	50MΩ/km

With Garland, you are always well connected.

Sales Enquiries 1800 66 99 99
www.madisontech.com.au/garland



Industrial / Power / Data / Security / Fibre

Garland's Pro Series range is the experts' choice for high quality cables.

Voltage Test: Conductor to core	1.5 kV ac/1min
---------------------------------	----------------

Mechanical Properties

Operating Temperature Range	-25 to 90°C
-----------------------------	-------------

Max. Recommended Pulling Tension	105N
----------------------------------	------

Min. Bend Radius (install)	27mm
----------------------------	------

Approximate Mass	2.78kg/100m
------------------	-------------

Sheath Printing

V97215  GARLAND FIGURE 8 TCW24HF - 2 X 24/0.2 LSZH

Supply Information

Pack Size	Pack Type	Dimensions	Qty Per Carton	Cartons Per Pallet
500m	Wooden Reel	W26 x H21.8cm	1R	

Document Change Record	Issue	Date	Prepared by	Approved By
	01	06-12-2012	LLS	Pent
Change History	Issue	Change		

With Garland, you are always well connected.

Sales Enquiries **1800 66 99 99**
www.madisontech.com.au/garland

