

Catalogue No: **GH15KT-3-24VAC**

CONTACTOR 37kW 3P 24V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Ghisalba Contactors > GH15 Contactor Range > 3 Pole Contactors 11 to 115kW



Representative Photo Only
(actual product may vary based on configuration selections)

Contactor 3 pole 80A 37KW 24V AC Coil

- Various contactor families, providing a wide variety of contactor sizes, offering economy and selection

SPECIFICATIONS

Component Type Motor Control and Drives	Standard Contactor
Ie, Rated Operational Current, AC-1, 415V, 55°C	125 A@415V,55°C
kW Rating, AC-3, 415V, 55°C	37 kW @415V, 55°C
Ie, Rated Operational Current, AC-3, 415V, 55°C	80 A@415V,55°C
kW Rating, AC-3, 690V, 55°C	45 kW @690V, 55°C
Ie, Rated Operational Current, AC-3, 690V, 60°C	50 A@690V,60°C
Ie, Rated Operational Current, AC-3, 1000V, 60°C	20 A@1000V,60°C
Number of Poles	3
Coil Type	Conventional type
Main Poles	3 N/O
Integrated Aux	6 N/O + 4 N/C
Coil Voltage	24 V AC V
Product Notes	AC Contactors 3 pole open type
IP Rating	IP20


REFERENCES

IECEx Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

Catalogue No: **GH15KT-3-24VAC**

CONTACTOR 37kW 3P 24V AC COIL

Motor Control and Drives > Motor Starting and Protection > Contactors > Ghisalba Contactors > GH15 Contactor Range > 3 Pole Contactors 11 to 115kW

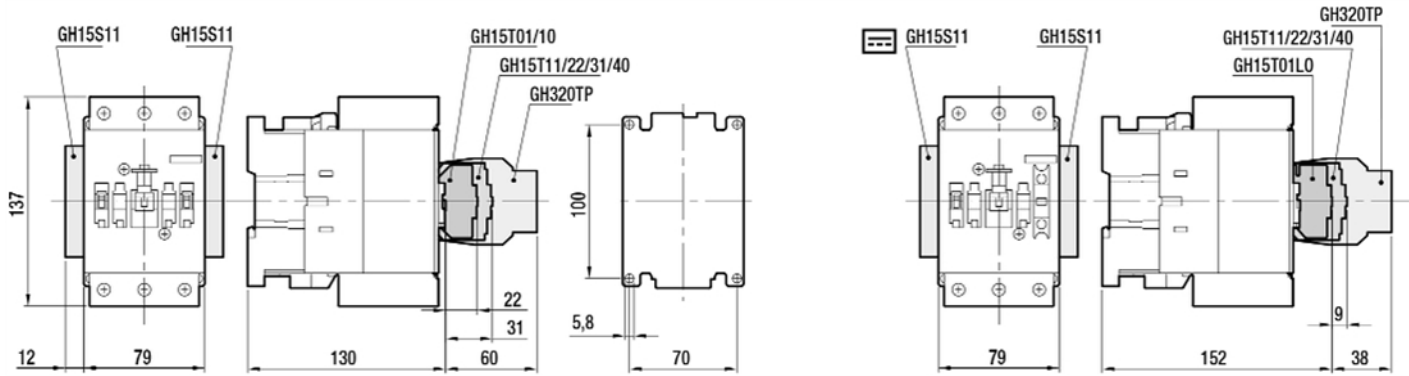

Dimension Diagram