


# AURORA10W

AURORA10W110-B

SAP CODE: 2002052

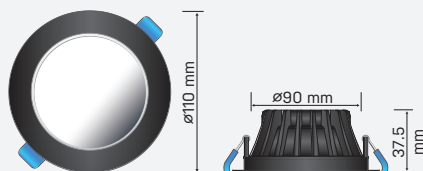


## 10W Black Tritone Fixed LED downlight

The AURORA10W series of downlights are available in three finishes, they are a dimmable low glare downlight with a recessed diffuser.



Photometric Diagram

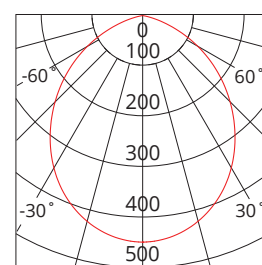

Unit: cd

 - C0/180 100.0deg  
 - C90/270 100.0deg

### KEY INFORMATION

Lumen Output	1050 / 1010 / 970lm
Input Power	10W
Hole Cutout Size	Ø90mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Fitting Colour	BLACK
Warranty	5yr
IP Rating	IP44
IK Rating	N/A
IC Rating	IC-4
Rebate Scheme Approvals	Pending Approval

### PHOTOMETRIC

Efficacy	105 / 101 / 97lm/W
LED	SMD
CCT	3000 / 4000 / 5700K
CRI	>80
Beam Angle	100°

### ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	32V DC
Power Factor	>0.9
LED Input Current (nominal)	300mA
Useful life @Ta25° (L70)	50,000hr

### CONSTRUCTION

Housing	Aluminium ADC12
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Rubberised Clip
Connection Type	1m Flex & Plug
Total Weight	0.3kg
Dimensions	Ø110 x 37.5mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2

\*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use Haneco or KASTA dimmers.