
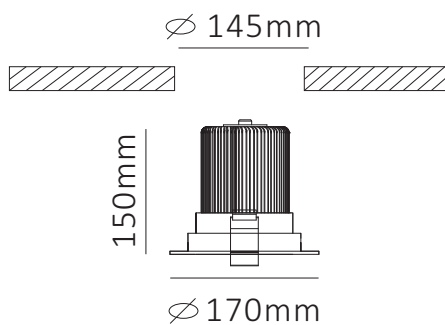



Stellar170A4K



Optical/Photometric

Lumen output	2360lm
Colour Render Index	83.6
Colour Temperature	4000K
Beam Angle	60°
LED Chip	SHARP

Product Specifications

Electrical

Supply Voltage	240-265V
Supply Frequency	50-60Hz
Supply Current	0.1308A
Power Factor	0.95
Input Power	31.28W
Output Voltage	37VDC
Output Current	700mA
LED Lamp	25.9W
Dimming	TRIAC
IP Rating	40
Cable	1.2M Flex&Plug

Physical

Fascia Colour	white
Heatsink	Aluminum
Diffuser	PC
Controller	Thermoplastic
Gimbal	30°
Body	Aluminum
G.W : 1.125kgs	N.W : 0.958kgs

Operational

Ambient Temp	-20° - 65°
Max. Surface Temp	60°
Lifespan	40,000 hrs @ ta 25°

Option: DALI Dimming, DSI Dimming, 1-10V Dimming