



VISTA

VISTA20W06-TRI-EM

SAP CODE: 2001158

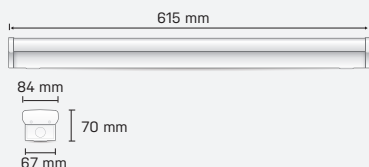

Photometric Diagram

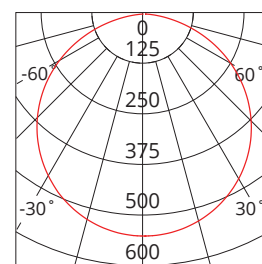

Unit: cd
 - C0/180 110.0deg
 - C90/270 110.0deg

600mm, 20W, Tritone, Emergency, conventional appearance LED batten

An LED replacement for conventional battens with Tritone switchable colour temperature and emergency battery.

Accessories

SUSPENSION KIT; WIREGUARD

KEY INFORMATION

Lumen Output	2000 / 2200 / 2100lm
Input Power	20W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP20
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approvals	N/A

PHOTOMETRIC

Efficacy	100 / 110 / 105lm/W
LED	SMD
CCT	4000 / 4700 / 5700K
CRI	>80
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	20-57VDC
Power Factor	>0.9
LED Input Current (nominal)	VIST-350mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION


Housing	Aluminium
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	Terminal Block PA14
Total Weight	0.8kg
Dimensions	615x84x70mm
Operating Ambient Temp.	0 to 50°C
Electrical Classification	Class 1
Food Grade Approval	HACCP

Emergency Battery

VISTA-EM-Battery
SAP CODE: 2001430

Self charging battery for VISTA20W06-TRI-EM during blackouts

Emergency Light Kit ensures that lights remain on at a light level sufficient to allow people to see their way for three hours if there is a power failure

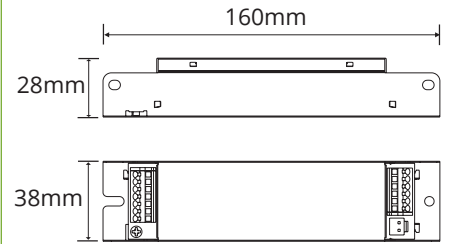

QUICK FACTS

- Self charging Ni-Cd battery
- Keeps lights on at emergency level for three hours
- Test switch and indicator light

SPECIFICATIONS

Max Battery Temperature	70°
Battery Warranty	1 Year
Emergency Classification	C0-180° D50 C90-270° D32

MAXIMUM SPACINGS FOR CLASS D LUMINAIRES

Maximum Spacings Mounting Height (Metres)

Luminaire Classification	2.1	2.4	2.7	3.0	3.3	3.6	4.0	4.5	5.0	6.0	7.0	8.0	9.0	10	15	20
D25	14.2	14.7	15.3	15.7	16.1	16.5	16.9	17.3	17.7	18.1	18.3	18.2	17.9	17.3	7.7	
D32	15.4	16.1	16.7	17.2	17.6	18.0	18.5	19.1	19.5	20.2	20.6	20.7	20.6	20.3	14.6	
D40	16.7	17.4	18.0	18.6	19.1	19.6	20.1	20.8	21.3	22.1	22.7	23.0	23.1	23.1	19.4	
D50	18.0	18.7	19.4	20.1	20.7	21.2	21.8	22.5	23.2	24.2	24.9	25.4	25.7	25.9	23.7	15.2
D63	19.4	20.3	21.1	21.8	22.4	23.0	23.7	24.5	25.2	26.4	27.4	28.1	28.6	28.9	28.0	22.5

