


RJ Series - Slim Power Relays



- Compact size for maximum space savings on DIN rail
- SPDT 12A and DPDT 8A contacts (high capacity 16A SPST-NO available)
- Optional non-polarized, green LED
- Locking and release lever on SJ sockets
- RoHS Compliant

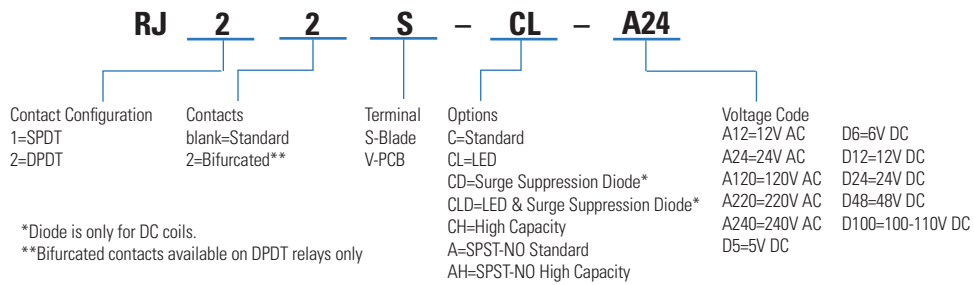

Specs		RJ1S	RJ2S	RJ22S	RJ22V
	Contact Material	Silver-Nickel Alloy		AgNi (gold clad)	
	Contact Rating	12A	8A	1A	1A
	Minimum Load (reference values)	100mA@5V DC, 10mA@5V DC (PCB version)			100µA@1V DC
	Dimensions (w x d x h) mm	12.7x28.8x33			

Relays			Standard DIN Rail Mount	Finger-safe DIN Rail Mount	PCB Mount
Sockets	Blade Models	RJ1S (Std)	SJ1S-05BW	SJ1S-07LW	SJ1S-61
		RJ2S (Std) RJ22S	SJ2S-05BW	SJ2S-07LW	SJ2S-61
	PCB Models	RJ1V (Std)	—	SQ1V-07B	SQ1V-63
		RJ1V (HC) , RJ2V/RJ22V	—	SQ2V-07B	SQ2V-63

		Use With Socket	Description	Part Number
Accessories	Hold Down Springs	SJ1S-05BW, SJ1S-07LW SJ2S-05BW, SJ2S-07LW	Pullover Locking Lever	SJ9Z-CM
		SQ1V-07B, SQ2V-07B		SQ9Z-C
		SQ1V-63, SQ2V-63		SQ9Z-C63
	DIN Rail	SJ1S-05BW, SJ2S-05BW SJ1S-07LW, SJ2S-07LW	Aluminum DIN Rail (1 meter length)	BNDN1000
			DIN Rail End Stop	BNL5
	Jumpers	all DIN mount sockets	2 Poles	SJ9Z-JF2
			5 Poles	SJ9Z-JF5
			8 Poles	SJ9Z-JF8
			10 Poles	SJ9Z-JF10
	Marking Plate	Finger Safe Sockets (only)	mount in choice of 5 different positions (sold in packs of 10)	SJ9Z-PWPN10