


J-TYPE gU Fuse Links - 415V

Features:


- Fast acting, for improved discrimination with HV fuses.
- Short circuit rating 80kA.
- Up to 457VAC (415V + 10%).
- Complies to AS60269-2.
- ASTA 20 certified.
- Full range gU category.

BS88: 1988 part 5 (Dimensions in mm)

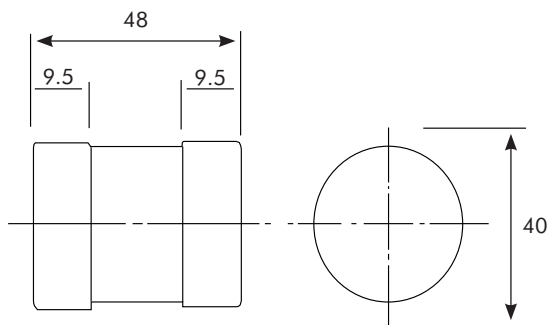

Type	Rating Amp	Part Number
JF	20	JF20
	32	JF32
	40	JF40
	50	JF50
	63	JF63
	80	JF80
	100	JF100
	125	JF125
	160	JF160
	200	JF200
	250	JF250
	315	JF315


BS88: 1988 part 5 (Dimensions in mm)

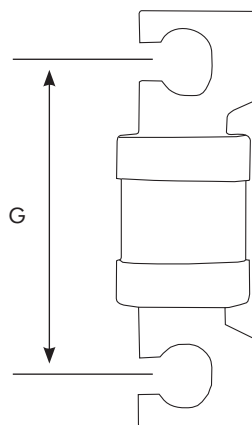

Type	Rating Amp	Part Number Fixing Centres G		
		76mm	82mm	92mm
JH, JP, JS	20	JH20	JP20	
	32	JH32	JP32	
	40	JH40	JP40	
	50	JH50	JP50	
	63	JH63	JP63	
	80	JH80	JP80	JS80
	100	JH100	JP100	JS100
	125	JH125	JP125	JS125
	160	JH160	JP160	JS160
	200	JH200	JP200	JS200
	250	JH250	JP250	JS250
	315	JH315	JP315	JS315
	355		JP355	JS355
	400		JP400	JS400
	450		JP450	JS450
	500		JP500	JS500
	560		JP560	JS560
	630		JP630	JS630
	800			JS800



TYPE J - TIME/CURRENT

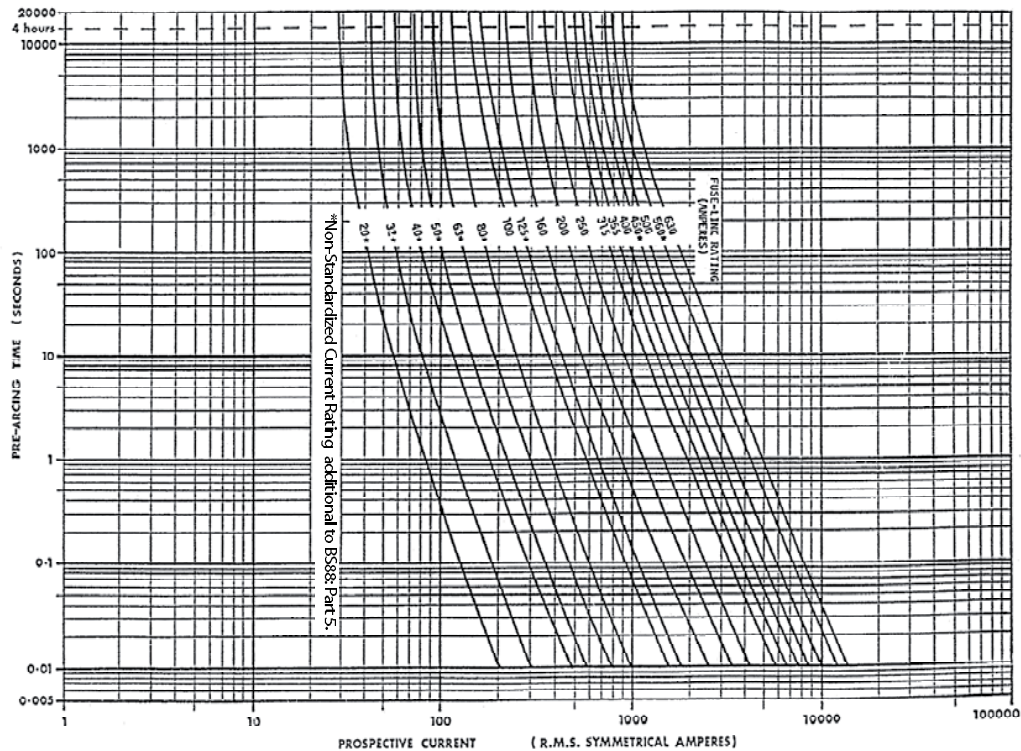

TYPE J - CUT-OFF CURRENT

