





# C101 Tri-colour Dimmable LED Downlight



## Features

- High grade Aluminium alloy construction with powder coated finish
- Advanced UV stabilised acrylic diffuser
- Excellent thermal control ensures the longevity of LED chips
- High output SMD LED chipset with excellent colour consistency and high CRI
- Average lifespan over 30,000 hours
- 3 Colour temperatures in ONE. Selectable via switch
- External dimmable driver with flex cord and plug
- Power factor: 0.9
- Interchangeable colour trims available in Black, Satin Chrome and Silver
- IP44 (from the bottom of fixture)

## Fixture Diagram

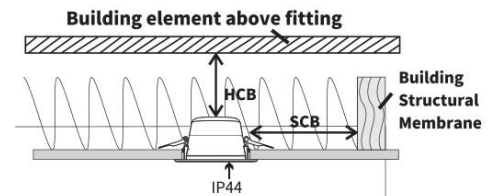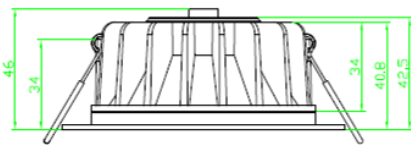

**RISK OF FIRE** - Require clearance from structural members and building elements.  
 SCB= 0 mm    HCB= 0 mm

## Optional Trims



## Specifications

Part No.	Power	CCT	Lumens	Voltage	Beam Angle	CRI	Cut-out (mm)	Trim Colour
PAK-LED-C101-10W3-TC-W	10W	3000K 4200K 5700K	800lm 945lm 890lm	220-240V	90°	≥80	Ø92	White