

Olflex® Lift F Flat Cables

Highly flexible power & control cable for cable trollies & elevators

Construction:

Class 6 superfine stranding, colour or number coded PVC insulation, special UV resistant, flame-retardant black PVC sheath.

Screened version contains high coverage individually screened copper braid.

Minimum Bending Radius:

10 x cable thickness

Temperature Range:

-15°C to +70°C

Nominal Voltage:


450/750 V

Colour Code Type:

A: Black, Brown, Blue, Green/Yellow

B: Grey, Black, Brown, Blue, Green/Yellow

C: Black Numbered Cores with 1 Green/Yellow

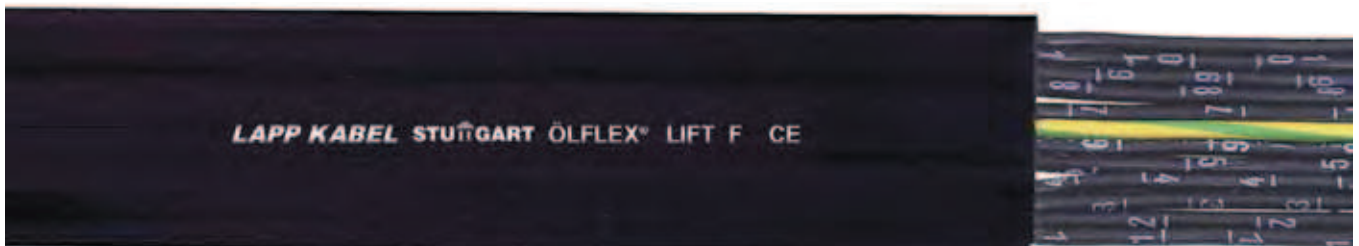

Part No.	Number of cores and nominal conductor area mm ²	Colour code type	Approx. overall dimensions mm	Approx. weight kg/km
0042 0013	3 core + earth 1.5mm	A	15.0 x 5.0	132
0042 002	4 core + earth 1.5mm	B	19.0 x 5.0	170
0042 003	6 core + earth 1.5mm	C	26.0 x 5.0	236
0042 004	7 core + earth 1.5mm	C	28.0 x 5.0	266
3803 357	(Screened) 7 core + earth 1.5mm	C	32.8 x 5.5	390
0042 005	9 core + earth 1.5mm	C	35.0 x 5.0	333
0042 006	11 core + earth 1.5mm	C	41.0 x 5.0	422
3801437	13 core + earth 1.5mm	C	49.5 x 5.0	500
0042 0073	3 core + earth 2.5mm	A	18.4 x 5.7	206
0042 008	4 core + earth 2.5mm	B	23.1 x 5.7	257
0042 009	6 core + earth 2.5mm	C	31.5 x 5.7	345
0042 010	7 core + earth 2.5mm	C	34.2 x 5.7	390
0042 050	11 core + earth 2.5mm	C	51.0 x 5.7	580
0042 0113	3 core + earth 4mm	A	20.4 x 6.6	343
0042 012	6 core + earth 4mm	C	35.4 x 6.6	589
0042 0133	3 core + earth 6mm	A	23.2 x 7.3	425
0042 0143	3 core + earth 10mm	A	28.4 x 9.0	709
0042 0153	3 core + earth 16mm	A	34.0 x 10.5	1015
0042 0163	3 core + earth 25mm	A	42.0 x 12.7	1366

Skintop® SVF-M

Brass metric cable gland for flat cables - IP54

CABLE GLAND

Part No.	Metric Thread	Flat Cable Width Min./Max.	Cable Thickness Min./Max.
5210 7350	M 32	14 / 27	4 / 11.5
5210 7360	M 40	24 / 34	4 / 11.5
5210 7370	M 50	29 / 44	5 / 12.0
5210 7380	M 63	34 / 50	5 / 12.0

LOCKNUT TO SUIT

Part No.	Metric Thread	Pack Size Pieces
5210 3040	32	100
5210 3050	40	50
5210 3060	50	50
5210 3070	63	25

