


PRODUCT DATASHEET

LDVAL PAN 0312 33-27W TRI UGR19

PANEL PLUS | Featuring dual wattage version, IP54, TRI CCT, phase dimming version and DALI version, complemented by a low-glare diffuser (UGR<19)

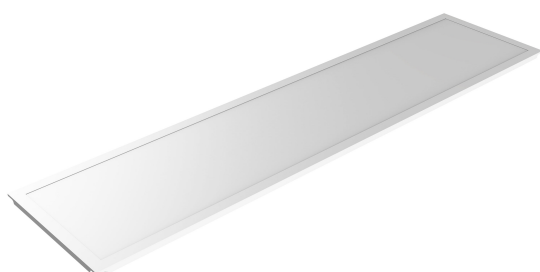

Areas of application

- Offices, conference rooms
- Reception areas and foyers
- Entrances / Hallways
- Retail
- Hospitality
- Libraries, schools

Product benefits

- Available in dual wattage version, phase dimming version and DALI version
- High luminous efficacy
- Good glare reduction (UGR < 19)

Product features

- TRI colour in 3000K, 4000K and 5700K
- Beam angle: 90°
- Type of protection: IP54
- High luminous efficacy: up to 120 lm/W
- Pre-wired with flex and plug
- Lifetime: up to 50,000 h

TECHNICAL DATA

Electrical data

Nominal wattage	27 W / 33 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	200.000 mA
Power factor λ	> 0.90
Protection class	II
Operating mode	External LED driver

Photometrical data

Luminous flux	3240 ... 4000 lm
Luminous efficacy	120 lm/W
Color temperature	3000 ... 5700 K
Light color (designation)	Warm White / Cool White / Cool Daylight
Color rendering index Ra	> 80
Standard deviation of color matching	< 5 sdcm
Beam angle	90 °
UGR	< 19

Dimensions & Weight

Length	1195.00 mm
Width	295.00 mm
Height	32.00 mm
Product weight	1844.00 g

LDVAL PANEL 0312 36 W

Materials & Colors

Product color	White
Housing color	White
Body material	Steel
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-10...+40 °C
---------------------------	--------------

Type of protection	IP54/IP20
Dimmable	No
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting length	1195.0 mm
Mounting width	295,0 mm
Replaceable light source (EPREL)	Not replaceable

Lifespan

Lifespan L70/B50 at 25 °C	50000 h ¹⁾
Lifespan L80/B10 at 25 °C	50000 h ¹⁾

¹⁾ t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Additional product data

BEG eligible	No
--------------	----

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854246968	Folding box 1	1,241 mm x 38 mm x 303 mm	2141.00 g	14.29 dm ³
4099854246975	Shipping box 6	1,262 mm x 254 mm x 330 mm	13799.00 g	105.78 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.