



LED Satellite Surface Mount – D50 

CAT NO. 659500/LI, 659501/LI, 659502/LI, 659503/LI



659500/LI

Specifications		
Cat No	659500/LI, 659502/LI	659501/LI, 659503/LI
Finish	White	Black
Battery pack	Li-ion 6.4V, 1.5Ah	
Operating Voltage	240V a.c. +/- 6% 50Hz	
Power Consumption	1.5W	
Body Constructions	Polycarbonate (satellite head), steel (enclosure)	
Operating Temperature	10° to 40°	
IP Rating	IP20	
Compliance	AS/NZS 2293 AS/NZS 60598  	

LED Satellite Surface Mount – D50



CAT NO. 659500/LI, 659501/LI, 659502/LI, 659503/LI

- iSmart™ temperature sensing technology for the LIION battery
- Electronics designed to lengthen the life of the battery, minimising maintenance costs
- Environmentally friendly battery
- Easy to install
- One high Brightness LED
- SPU or Axiom options
- 5 year warranty
- Designed and manufactured in Australia


Spacing table:

Maximum spacings between luminaires for 0.2 lux



Mounting Height (m)	2.4	2.7	3	3.3	3.6	4.0
A	18.7	19.4	20.1	20.7	21.2	21.8
B	18.7	19.4	20.1	20.7	21.2	21.8

Maximum spacings between luminaires for 1 lux

Mounting Height (m)	2.4	2.7	3	3.3	3.6	4.0
A	10.5	10.8	11	11.2	11.3	11.4
B	10.5	10.8	11	11.2	11.3	11.4

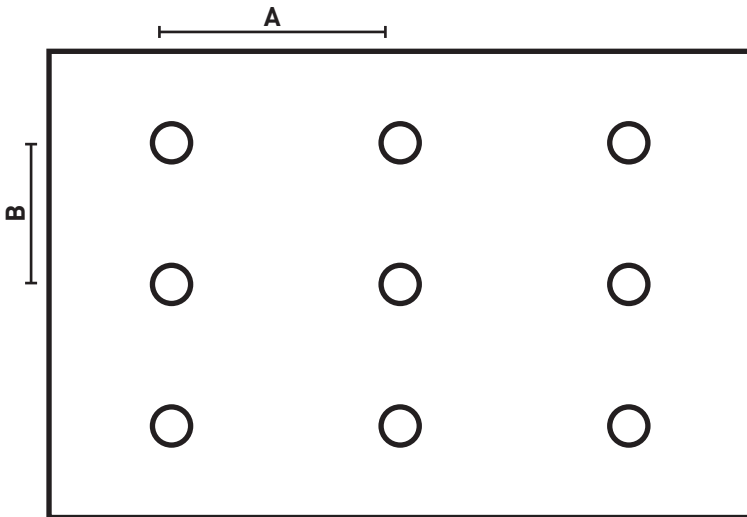

DIMENSIONS

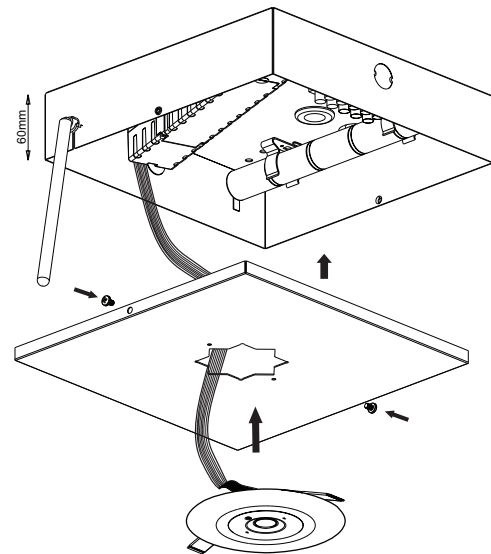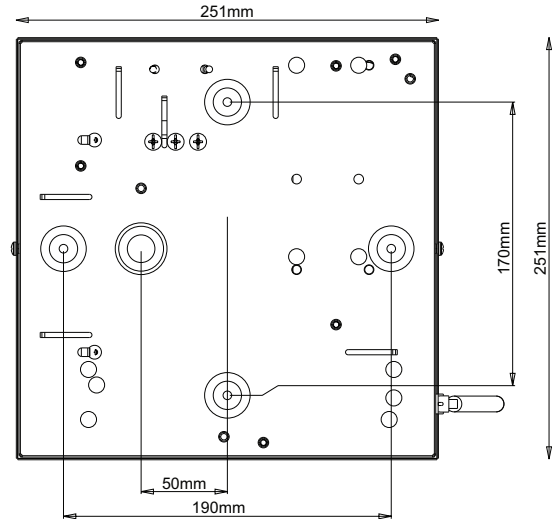

Legrand - Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand - New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.