



CAT NO. **685100LI**



Specifications Mode of operation Maintained Supply voltage 240V a.c. +/- 6% 50Hz 3.5W Power consumption **Battery** Li-ion 6.4V 570mAh Operating temperature 10° to 40° IP rating IP20 **Body construction** Polycarbonate Diffuser construction Polycarbonate AS/NZS 2293 AS/NZS60598 🔬 🔔 Compliance




La legrand[®]

CAT NO. **685100LI**

- Easy slide bracket
- Drop in decals
- 50,000 hours LED life
- One box solution
- Can be wall or ceiling mounted
- Large terminal block for ease of connection
- iSmart[™] temperature sensing technology for the LIION battery
- Electronics designed to lengthen the life of the battery, minimising maintenance costs
- Environmentally friendly battery
- Designed in Australia
- 3 year warranty

Classification	Maximum spacing between luminaires Mounting Height (Metres)				
Metres Classification	2.7	3	3.3	3.6	4
D3.2	6.6	6.5	6.4	6.2	5.8

DIMENSIONS

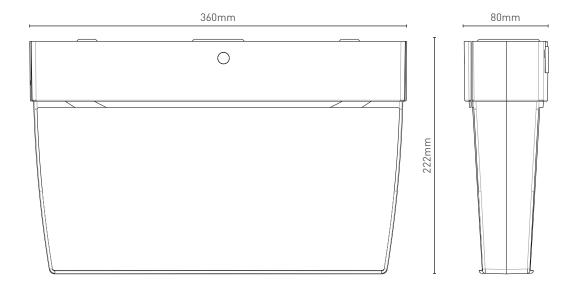

Legrand - Australia 1300 369 777 www.legrand.com.au ABN 31 000 102 661

Legrand - New Zealand 0800 476 009 www.legrand.co.nz Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.