


FORTIS TRI

IP65 TRI-PROOF LED BATTEN

WHERE WATERPROOF & DUST PROOF LIGHTING IS NECESSARY



To see 360 degree rotations of this product visit littil.com.au

APPLICATIONS

This IP65 LED tri-proof light is widely used in retail stores, semi-outdoor ceilings, workshops, agriculture sheds, car parks, public places & food processing factories.

The high energy efficiency light source and constant current output design, greatly improve the fixture's life span.

FEATURES & BENEFITS

- Surface mounted, recessed and suspended options available
- Top and side cable exit options to suit your application
- Versatile, all-in-one **stream line body** with high-density silicon rubber sealing ring protection
- **Unique PVC material** and **stainless steel mounting clips** for easy installation

	15W	35W	43W
--	-----	-----	-----

GENERAL

Model Number	TriLED15-600	TriLED35-1200	TriLED43-1500
Dimensions (mm)	640 x 124 x 43	1200 x 124 x 43	1500 x 124 x 43
Weight	1.3KG	2.5KG	3.1KG
Sail Area	N/A		
Lighting Category	Linear		
Lifetime	Reported: >35,000hrs & Calculated: Up to 65,000 hrs		
IP & IK Rating	IP65		
Warranty	5 years		
Cable & Plug	1.2m AC Cable		
Storage Temperature	-20 ~ 60°C		
Operating Temperature	40°C		

OPTICAL

Beam Angle	120°		
Lumens	1500lm	3500lm	4300lm
LED Type	HONGLI SMD 2835		
No. of LEDs	168	432	528
LED Colour Temperature	4000K, 5000K		
Colour Rendering Index	>80		

ELECTRICAL

Driver Type	Internal		
Voltage	220 - 240 VAC, 50/60 Hz		
Power Factor	>0.9		
Inrush Current	N/A	N/A	N/A
Output Voltage	60-80Vdc		
Output Current	0.125A	0.48A	0.58A
Dimming	Non-Dimmable		
Sensor capability	No		

COMPLIANCE



AS/NZS 60598.1
AS/NZS 60598.2.1


ISO 9001



SKU

ORDERING

Fortis TriProof 15W 640 4K ND	9343907002252
Fortis TriProof 35W 1200 4K ND	9343907002253
Fortis TriProof 43W 1500 4K ND	9343907002254
Fortis TriProof 35W 1200 5K ND	9343907002504




FORTIS TRI


IP65 TRI-PROOF LED BATTEN

LUMINOUS INTENSITY DISTRIBUTION FOR FORTIS TRI-PROOF


15W/ UGR<24/ 100LM/W

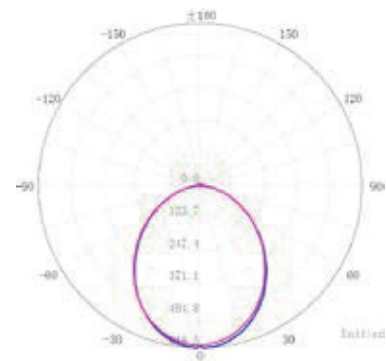


Total Flux: 1497lm

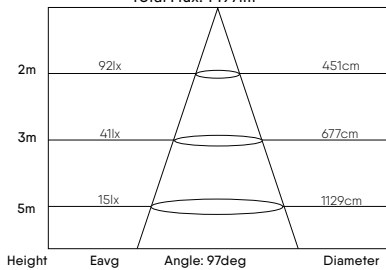


35W/ UGR<22/ 100LM/W

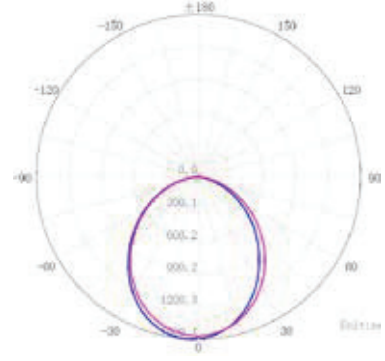


Total Flux 4753lm

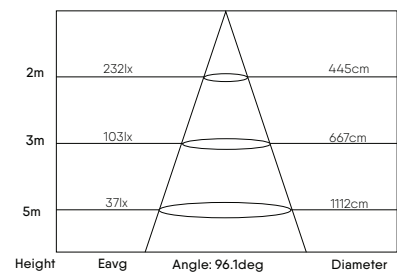

45W/ UGR<21/ 100LM/W

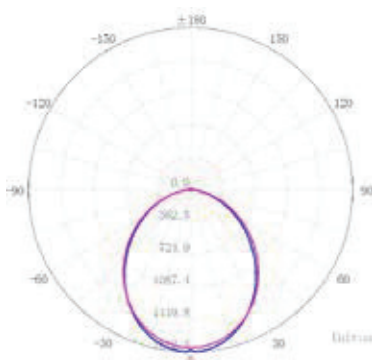

Total Flux: 6649lm

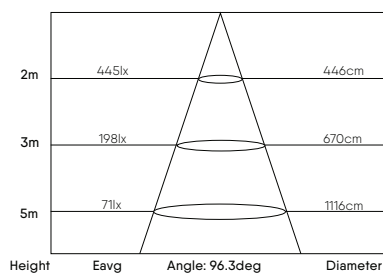


DIMENSIONAL DRAWINGS

TriLED15-600



TriLED35-1200

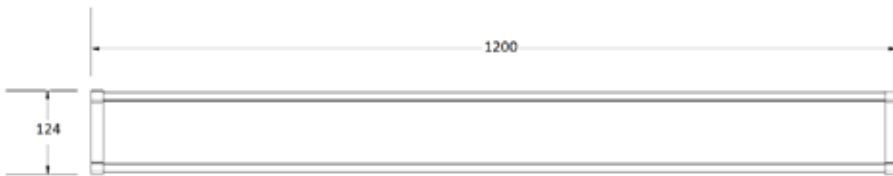

TriLED43-1500

