


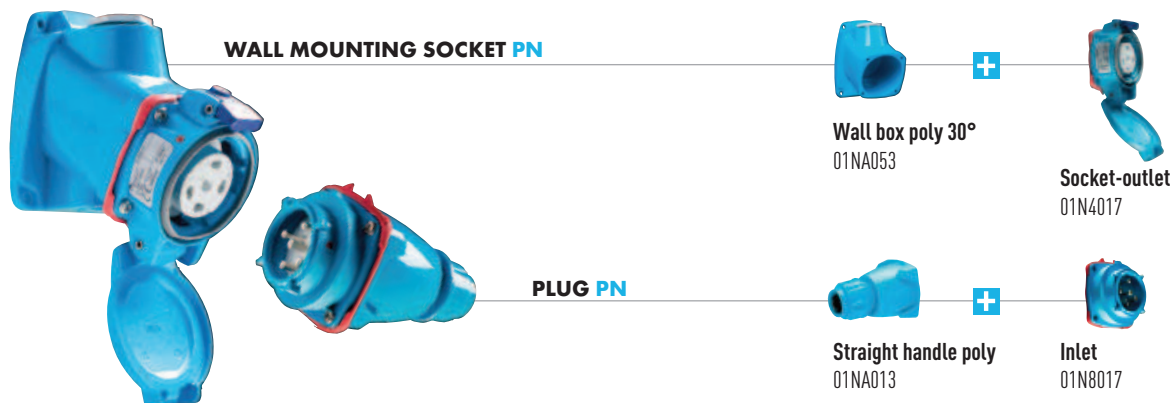

## MAIN FEATURES

|                                                   |           |                           |                          |
|---------------------------------------------------|-----------|---------------------------|--------------------------|
| Rated current (with wiring according to standard) | 30 A      | Ambient temperature       | -40 °C to +60 °C         |
| Maximum voltage                                   | 500 V     | Flexible wiring (min-max) | 1 - 6 mm <sup>2</sup>    |
| IP protection lid closed                          | IP66/IP67 | Stranded wiring (min-max) | 1,5 - 10 mm <sup>2</sup> |
| IP protection connected plug                      | IP66/IP67 | Other wiring              | on request               |
| Shock resistance (poly casing)                    | IK08      | Keying positions          | 16                       |
| Shock resistance (metal casing)                   | IK09      |                           |                          |

### DUAL VOLTAGE SOCKET-OUTLET (SEE P.8)

| Voltage 50 Hz           | Polarity | Part no. | Part no. |
|-------------------------|----------|----------|----------|
| 20 - 24 V               | 2P       | 01N408A  | 01N808A  |
| 190 - 230 V             | 3P+E     | 01N4033  | 01N8033  |
| 220 - 250 V             | 1P+N+E   | 01N4015  | 01N8015  |
| 380 - 440 V             | 3P+E     | 01N4013  | 01N8013  |
| 220 - 250 V 380 - 440 V | 3P+N+E   | 01N4017  | 01N8017  |
| 480 - 500 V             | 3P+E     | 01N4093  | 01N8093  |
| 480 - 500 V             | 3P+N+E   | 01N4097  | 01N8097  |

► Other voltages, frequencies and contact configurations are available (see page 10).

### DUAL VOLTAGE SOCKET-OUTLET (SEE P.8)

| Voltage 50 Hz           | Polarity | Part no. | Part no. |
|-------------------------|----------|----------|----------|
| 20 - 24 V               | 2P       | 09N408A  | 09N808A  |
| 190 - 230 V             | 3P+E     | 09N4033  | 09N8033  |
| 220 - 250 V             | 1P+N+E   | 09N4015  | 09N8015  |
| 380 - 440 V             | 3P+E     | 09N4013  | 09N8013  |
| 220 - 250 V 380 - 440 V | 3P+N+E   | 09N4017  | 09N8017  |
| 480 - 500 V             | 3P+E     | 09N4093  | 09N8093  |
| 480 - 500 V             | 3P+N+E   | 09N4097  | 09N8097  |

► Other voltages, frequencies and contact configurations are available (see page 10).



CERTIFICAT N°  
FR 60037180-5371840

**BOXES**Cable gland  
not included**Wall box  
poly 30°****Wall box  
poly droit****Wall box  
metal straight****Wall box metal +  
Inclined metal 45°****Wall box poly +  
Inclined poly 70°**

| Entry |         |         |         |            |                                                            |
|-------|---------|---------|---------|------------|------------------------------------------------------------|
| M20   | 01NA053 | 01NA055 | 09NA055 | 09NA653    | Not drilled and<br>without cable gland<br>Part no. 51AA058 |
| M25   |         |         |         | 09NA653418 |                                                            |
| M32   |         |         |         | 09NA653419 |                                                            |

**SLEEVES****Inclined  
poly 30°****Inclined  
metal 30°****Inclined  
poly 70°**

611A057

09NA027

51AA757

**HANDLES****Straight poly****Angled poly****Straight poly  
with poly cable  
gland****Straight metal  
with metal  
cable gland****Straight poly  
without cable  
gland with  
metric threaded  
entry**

|         |         |         |          |            |          |            |     |            |
|---------|---------|---------|----------|------------|----------|------------|-----|------------|
| 9-18 mm | 01NA013 | 01NA313 | 5-12 mm  | 01NA753    | 7-13 mm  | 09NA963    | M20 | 01NA253417 |
| 5-21 mm | 611A413 |         | 8-18 mm  | 01NA25325P | 8-16 mm  | 09NA95325M | M25 | 01NA253418 |
|         |         |         | 14-25 mm | 01NA25332P | 16-24 mm | 09NA95332M | M32 | 01NA253419 |

**INDUSTRIAL-DOMESTIC  
ADAPTERS**Industrial inlet MARECHAL® 1P+N+E domestic socket-outlet  
10/16 A 230V 10 A and 16 A.

| Type    | Material | Part no.   |
|---------|----------|------------|
| France  | GRP      | 01N8015D11 |
| France  | Metal    | 09N8015D11 |
| UK      | GRP      | 01N8015D40 |
| UK      | Metal    | 09N8015D40 |
| Germany | GRP      | 01N8015D30 |
| Germany | Metal    | 09N8015D30 |
| Italy   | GRP      | 01N8015D06 |
| Italy   | Metal    | 09N8015D06 |

**ACCESSORIES & OPTIONS****Locking with padlock (ø 4 mm) without  
shaft (padlocks not supplied)**

Socket no. + 843

**Screw locking imprint BTR 2,5**

Socket no. + 22

**Reversed interior and contacts  
(inlet cap is included)**

Inlet no. + 001

Socket no. + 001

**IP55 self-closing lid (Socket-outlet)**

Replace N by S

Eg: 400 V 3P+N+E poly = 01S4017

**Inlet cap**

01NA126

**Self-returning lid**

Socket no. + R

**180° opening lid**

Socket no. + 10

**180° opening and self-returning lid**

Socket no. + 18