


FEATURES & BENEFITS

- Tapered cable entry
- Deep flat/slotted screw heads, enabling tight positive connection
- Soft, pliable material
- High quality jar

SPECIFICATIONS


Material: Insulator - Flame retardant PVC
Connector - Brass

Voltage: 450V

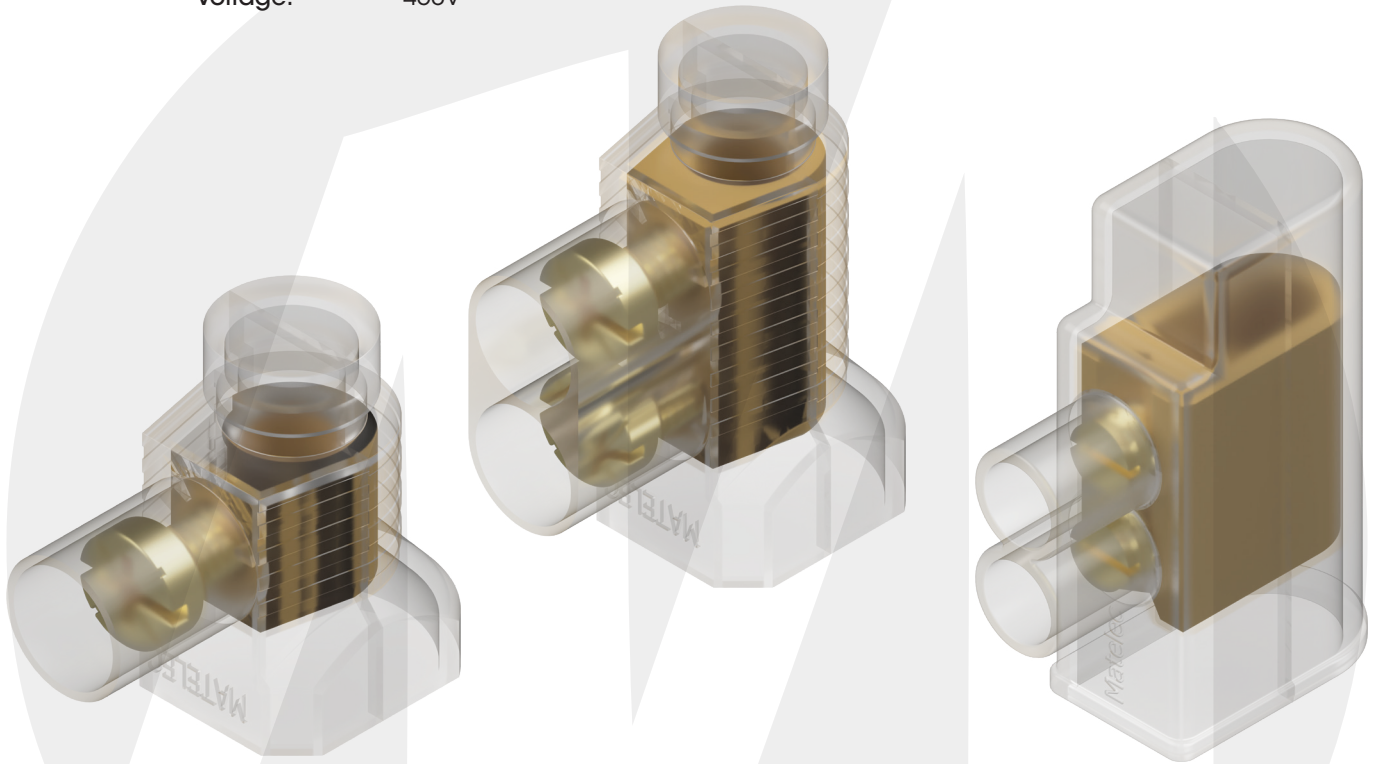

DIMENSIONS

	2 x 6mm ² Single	2 x 6mm ² Double	3 x 6mm ² Single	2 x 16mm ² Double	2 x 35mm ² Double
D1 (mm)	22	22	25.2	38	45
D2 (mm)	20.3	27.2	22.16	44.5	58.5
D3 (mm)	4.8	4.8	4.8	8	11.5

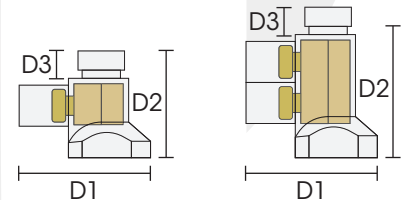

CABLE CONNECTORS - INSULATED RANGE

Code	Description	Amp Rating	Packing	MOQ	Ctn
SC2-2X6/50	2 x 6mm ² Double Screw Connector	32 Amp	50/Jar	1 Jar	18
SC1-2X6/100	2 x 6mm ² Single Screw Connector	32 Amp	100/Jar	1 Jar	18
SC1-2X6/500	2 x 6mm ² Single Screw Connector	32 Amp	500/Jar	1 Jar	4
FCN-16230	2 x 6mm ² Double Screw Connector	32 Amp	300/Jar	1 Jar	4
SC2-2X16	2 x 16mm ² Double Screw Connector	63 Amp	10/Box	1 Box	750
SC2-2X35	2 x 35mm ² Double Screw Connector	80 Amp	10/Jar	1 Jar	18
SC1-3X6/50	3 x 6mm ² Single Screw Connector	40 Amp	50/Jar	1 Jar	18