


ECO LED Batten Gen 3

The ECO LED Batten Gen 3 is a one box solution with Colour Select across the range and the new Lumen Select option is now available in the 4ft version. The quick release clips and removable connector, insect-proof sealed LED module makes it easy to install and maintain. With up to 110lm/W, the efficacy makes it an ideal replacement for traditional battens.

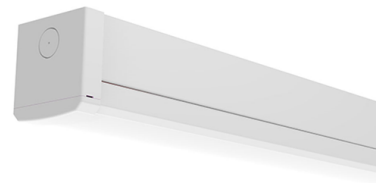

- Increased visual comfort with less than 1% flicker
- Easy to install with larger 4mm terminal block and rear cable entry
- Opalised diffuser for even light distribution

LUMEN^{SELECT} COLOUR^{SELECT}



80

CRI



IP20

Ingress
Protection
Rating



IK06

Impact Rating



5SDCM

MacAdam
Steps



0 - 40°C

Operating
Temperature



Non -
Dimmable

Dimming



54,000hrs
(L70/B50)

Lifetime



4 Years

Warranty



Symmetric

Beam
Distribution




120°


Beam Angle

CODE	SYSTEM POWER	EXIT LUMEN	LM/W	CCT	DIMENSIONS	WEIGHT	INRUSH CURRENT	LINE CURRENT
ECOBAT202ECSG3	18W	1700lm	94lm/W	4000K	L603 x W74 x H74mm	1kg	12A	0.07A
		1900lm		5000K				
		1700lm		6500K				
ECOBAT404ECSLS	36W	3600lm	100lm/W	4000K	L1164 x W74 x H74mm	2kg	20A	0.15A
	18W	2180lm		4000K				
	18W	2300lm		5000K				
	18W	2190lm		6500K				
	25W	2700lm		4000K				
	25W	2960lm		5000K				
	25W	2770lm		6500K				
	30W	3200lm		4000K				
	30W	3600lm		5000K				
	30W	3300lm		6500K				
	36W	4100lm		5000K				
	36W	3700lm		6500K				

ACCESSORY CODE	DESCRIPTION
WG4	W/GUARD 1200MM C/W BRACKETS
WG2	W/GUARD 600MM C/W BRACKETS

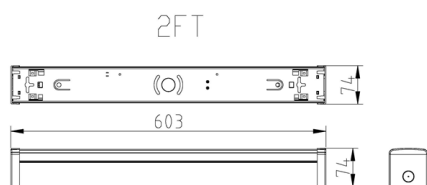

ECOBAT202EC SG3

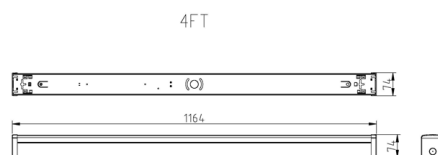

ECOBAT404EC SLS