


Vandalux Emergency LED Washbay

Pierlite Vandalux LED Emergency with die-cast LM6 aluminium body with frosted polycarbonate lens, modular gear tray IP66, IK10

- Pressure die-cast marine grade aluminium body with a powder coated paint finish
- Covers five luminaire outputs and wattages to help reduce the number of luminaire types in mains mode (65W-5628lm, 55W-5047lm, 38W-4092lm, 32W-3596lm & 23W-2837lm) & (32W-2944lm, 28W-2576lm, 24W-2208lm, 20W-1840lm, 18w-1652lm)
- Robust frosted polycarbonate lens resists impact & abuse with IK10 with High ingress protection IP66

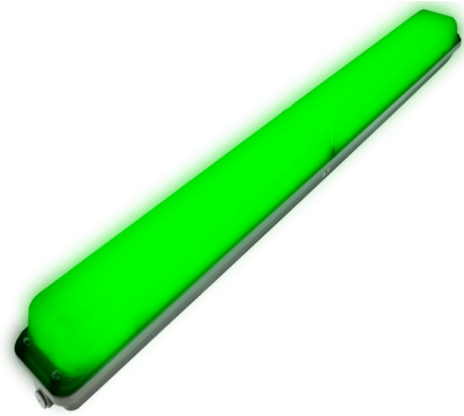

LUMEN SELECT™



39

CRI



IP66

Ingress Protection Rating



IK10

Impact Rating



3SDCM

MacAdam Steps



0°C to 50°C

Operating Temperature



DALI

Dimming



60,000hrs (L70/B50)

Lifetime




5 Years


Warranty

CODE	SYSTEM POWER	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS	WEIGHT
VXOLS2DGM2	32W	3596lm	93lm/W	477K	L700 x W138 x H114 mm	4kg
	36W	3861lm				
	23W	2510lm				
	20W	1840lm				
VXOLS4DGM2	55W	5047lm	93lm/W	477K	L1310 x W138 x H114 mm	8kg
	65W	5628lm	86lm/W			
	38W	4092lm	107lm/W			
	32W	3596lm	112lm/W			
	23W	2837lm	123lm/W			


EMERGENCY MODE WATTAGE	EMERGENCY MODE LUMEN	BATTERY	BATTERY VOLTAGE	BATTERY CAPACITY	TESTING SYSTEM
3W	350lm	LiFePO4	3.2V	3200mA	Self Test

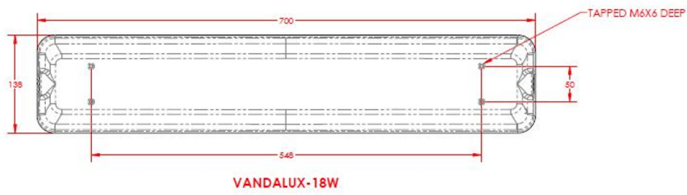


VXOLS4DGM2, VXOLS2DGM2

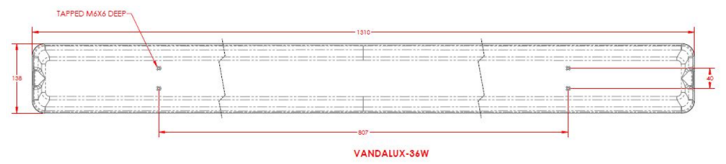

VXOLS4DGM2

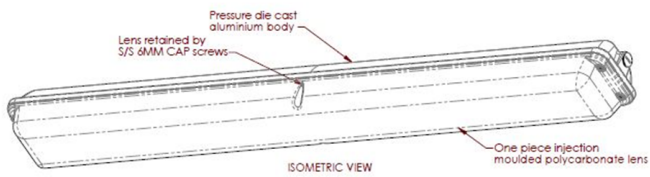

VXOLS4DGM2

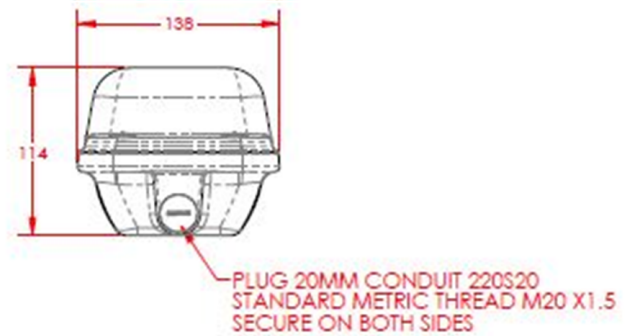

VXOLS4DGM2, VXOLS2DGM2