

Vandalux LED Lumen Select GEN2

The Australian designed and assembled Vandalux adverse weatherproof range have a proven and trusted history of being tough for all levels of industry and public areas including transport facilities, schools, heavy industry and high vandalism areas. The control gear has been redesigned to be simplified, ultra-efficient and versatile with Lumen Select Technology, order 1 fitting with multiple wattages/lumen outputs in the same traditional body and diffuser making it easier to replace, keeping the same appearance through your installation.

- Pressure die-cast LM6 marine grade aluminium body with a powder coated paint finish and Robust frosted polycarbonate lens resist impact & abuse
- Multiple wattages/Lumen outputs in 1 fitting
- Two sizes available 4FT (22W, 30W, 37W, 53W, 63W) and 2FT (16W, 20W, 28W, 33W)



LUMEN SELECT™



IP66

Ingress Protection Rating



IK10

Impact Rating



-25°C to 50°C

Operating Temperature



DALI

Dimming



72,000hrs (L70/B10)

Lifetime



5 Years

Warranty

CODE	SYSTEM POWER	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS	WEIGHT
VXOLS2D4	28W	3351lm	110lm/W	4000K	L700 x W138 x H114mm	4kg
	33W	3861lm	117lm/W			
	16W	2114lm	129lm/W			
	20W	2510lm	127lm/W			
VXOLS2D4K	28W	3351lm	110lm/W	4000K	L700 x W138 x H114mm	4kg
	16W	2114lm	129lm/W			
	20W	2510lm	127lm/W			
	33W	3861lm	117lm/W			
VXOLS2D4PB	28W	3351lm	110lm/W	4000K	L700 x W138 x H114mm	4kg
	16W	2114lm	129lm/W			
	20W	2510lm	127lm/W			
	33W	3861lm	117lm/W			
VXOLS4D3	53W	6153lm	120lm/W	3000K	L1310 x W138 x H114mm	8kg
	30W	3837lm				
	37W	4576lm				
	22W	2812lm				
	63W	7121lm				
VXOLS4D4	53W	6153lm	108lm/W	4000K	L1310 x W138 x H114mm	8kg
	30W	3837lm	129lm/W			
	37W	4576lm	123lm/W			
	63W	7121lm	113lm/W			
	22W	2812lm	128lm/W			
VXOLS4D4K	53W	6153lm	130lm/W	4000K	L1310 x W138 x H114mm	8kg
	22W	2812lm	123lm/W			
	30W	3837lm	121lm/W			

VXOLS4D4K	37W	4576lm	119lm/W			
	63W	7121lm	111lm/W			
VXOLS4D4PB	53W	6153lm	108lm/W	4000K	L 1310 x W138 x H114mm	8kg
	22W	2812lm	127lm/W			
	30W	3837lm	127lm/W			
	37W	4576lm	123lm/W			
	63W	7121lm	113lm/W			
VXOLS4DB	55W	1867lm	40lm/W	7571K	L 1310 x W138 x H114mm	8kg
	23W	926lm	40lm/W			
	32W	1223lm	38lm/W			
	38W	1435lm	38lm/W			
	65W	2122lm	33lm/W			


ACCESSORY CODE

DESCRIPTION


C33VANDALUX

Flat wall mount Bracket, Mild steel, Hot Dip Galvanised Finish


Line Drawings

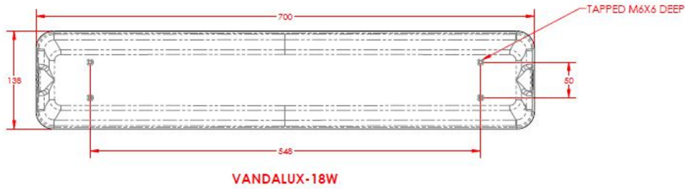

VXOLS2D4

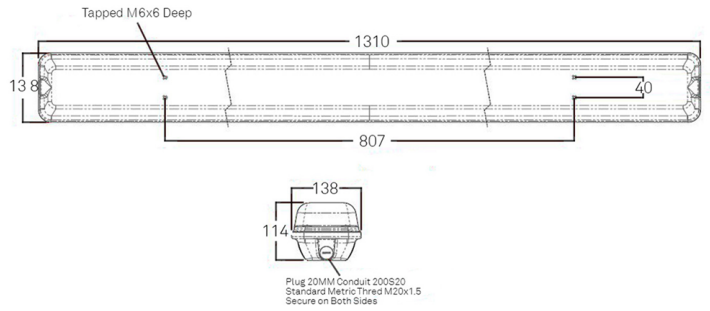


VXOLS4D4

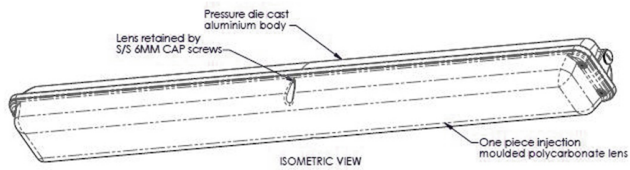



Accessories

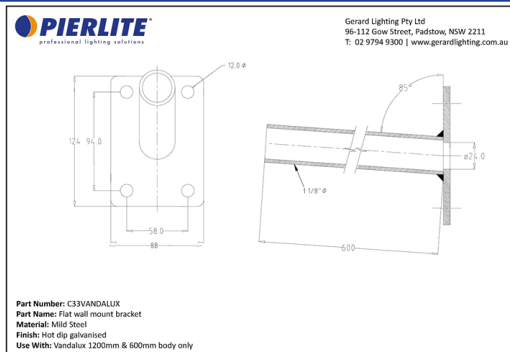

C33VANDALUX