

Litelux Colour Select Downlight Gen4

Introducing the new generation Pierlite Litelux Colour Select Downlight Gen4, now with a higher lumen output averaging an outstanding 120lm/W for the DLP6 with integral driver. Retaining all the key features of the Litelux Colour Select - 3000K/4000K/6500K for both integral driver and remote driver options. Both maintain optimal compatibility with our market leading Pierlite Diginet Dimmer range. IC-4 compliant makes its suitable of all interior applications as it can be abutted against building thermal materials, including building insulation and can be covered in normal use.



COLOURSELECT

- Select colour temperature from 3000K/4000K/6500K to adapt to any application
- Flush soft diffused lens for uniform distribution
- Integral phase dimmable driver and remote phase dimmable option for low ceiling voids



80

CRI



IK02

Impact Rating



6SDCM

MacAdam Steps



0 to 40

Operating Temperature



Phase

Dimming



50,000hrs
(L70/B10) @
40°C

Lifetime



3 Years

Warranty



Symmetric

Beam Distribution




IC-4


IC Rated

CODE	EXIT LUMEN	EFFICACY	CCT	DIMENSIONS	WEIGHT	INRUSH CURRENT	INRUSH CURRENT DURATION	LINE CURRENT
DLP53/4/65FWG4	870lm	111lm/W	4000K 3000K 6500K	L115 x W115 x H33 mm	0.26kg	1.3A	132µs	3.5A
DLP63/4/65FWG4	850lm	120lm/W	3000K 4000K 6500K	L115 x W115 x H58 mm	0.17kg	1A	17µs	0.31A

Line Drawings

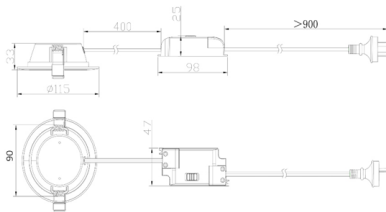

DLP53/4/65FWG4

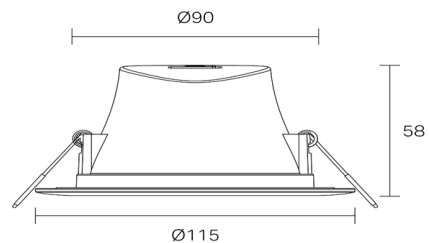

DLP63/4/65FWG4



DLP53/4/65FWG4



DLP53/4/65FWG4



DLP53/4/65FWG4



DLP53/4/65FWG4



DLP53/4/65FWG4



DLP63/4/65FWG4



DLP63/4/65FWG4



DLP63/4/65FWG4