

powered by

Q.ANTUM DUO Z

Q.PEAK DUO ML-G10.a+

385-410

ENDURING HIGH
PERFORMANCE



BREAKING THE 21% EFFICIENCY BARRIER

Q.ANTUM DUO Z Technology with zero gap cell layout boosts module efficiency up to 21.1%.



THE MOST THOROUGH TESTING PROGRAMME IN THE INDUSTRY

Q CELLS is the first solar module manufacturer to pass the most comprehensive quality programme in the industry: The new "Quality Controlled PV" of the independent certification institute TÜV Rheinland.



INNOVATIVE ALL-WEATHER TECHNOLOGY

Optimal yields, whatever the weather with excellent low-light and temperature behaviour.



ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID Technology, Hot-Spot Protect and Traceable Quality Tra.Q™.



EXTREME WEATHER RATING

High-tech aluminium alloy frame, certified for high snow (5400Pa) and wind loads (4000Pa).



A RELIABLE INVESTMENT

Inclusive 25-year product warranty and 25-year linear performance warranty¹.

¹ See data sheet on rear for further information.

THE IDEAL SOLUTION FOR:




Rooftop arrays on
residential buildings

Engineered in Germany

Q CELLS

MECHANICAL SPECIFICATION

Format	1879mm × 1045mm × 32mm (including frame)
Weight	22.0kg
Front Cover	3.2mm thermally pre-stressed glass with anti-reflection technology
Back Cover	Composite film
Frame	Black anodised aluminium
Cell	6 × 22 monocrystalline Q.ANTUM solar half cells
Junction box	53-101mm × 32-60mm × 15-18mm Protection class IP67, with bypass diodes
Cable	4mm ² Solar cable; (+) ≥1250mm, (-) ≥1250mm
Connector	Stäubli MC4; IP68

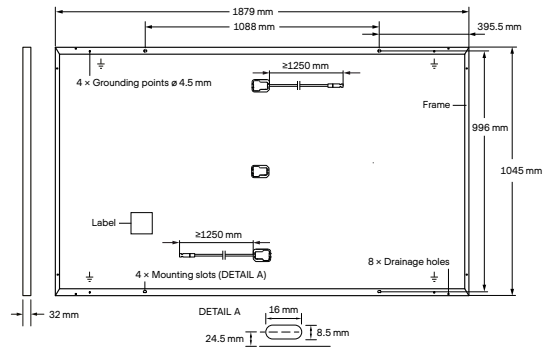


ELECTRICAL CHARACTERISTICS

POWER CLASS				385	390	395	400	405	410
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC ¹ (POWER TOLERANCE +5 W / -0 W)									
Minimum	Power at MPP ¹	P _{MPP}	[W]	385	390	395	400	405	410
	Short Circuit Current ¹	I _{SC}	[A]	11.07	11.10	11.13	11.16	11.19	11.22
	Open Circuit Voltage ¹	V _{OC}	[V]	44.96	44.99	45.03	45.06	45.09	45.13
	Current at MPP	I _{MPP}	[A]	10.47	10.53	10.58	10.64	10.70	10.76
	Voltage at MPP	V _{MPP}	[V]	36.78	37.05	37.32	37.59	37.85	38.11
	Efficiency ¹	η	[%]	≥19.6	≥19.9	≥20.1	≥20.4	≥20.6	≥20.9
MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT ²									
Minimum	Power at MPP	P _{MPP}	[W]	288.9	292.6	296.4	300.1	303.9	307.6
	Short Circuit Current	I _{SC}	[A]	8.92	8.95	8.97	8.99	9.02	9.04
	Open Circuit Voltage	V _{OC}	[V]	42.39	42.43	42.46	42.49	42.52	42.56
	Current at MPP	I _{MPP}	[A]	8.22	8.28	8.33	8.38	8.43	8.48
	Voltage at MPP	V _{MPP}	[V]	35.12	35.35	35.59	35.82	36.04	36.27

¹Measurement tolerances $P_{MPP} \pm 3\%$; I_{SC} ; $V_{OC} \pm 5\%$ at STC: 1000 W/m^2 , $25 \pm 2^\circ\text{C}$, AM 1.5 according to IEC 60904-3 • 2800 W/m^2 , NMOT, spectrum AM 1.5


Q CELLS PERFORMANCE WARRANTY

PERFORMANCE AT LOW IRRADIANCE

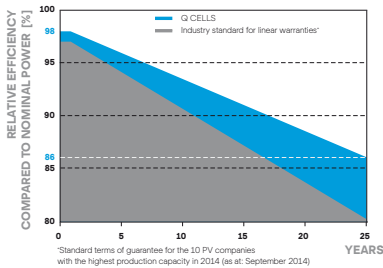

At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 86% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

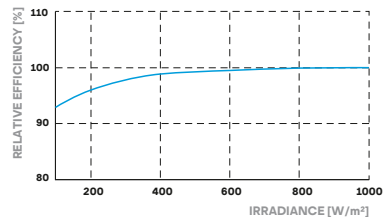

Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000W/m²).

TEMPERATURE COEFFICIENTS							
Temperature Coefficient of I_{SC}	α	[%/K]	+0.04	Temperature Coefficient of V_{OC}	β	[%/K]	-0.27
Temperature Coefficient of P_{MPP}	γ	[%/K]	-0.34	Nominal Module Operating Temperature	NMOT	[°C]	43±3

PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage	V_{SYS}	[V]	1000	PV module classification	Class II
Maximum Reverse Current	I_R	[A]	20	Fire Rating based on ANSI / UL 61730	C / TYPE 2
Max. Design Load, Push / Pull		[Pa]	3600/2660	Permitted Module Temperature on Continuous Duty	-40°C - +85°C
Max. Test Load, Push / Pull		[Pa]	5400/4000		

QUALIFICATIONS AND CERTIFICATES

Quality Controlled PV - TÜV Rheinland;
IEC 61215:2016; IEC 61730:2016.
This data sheet complies
with DIN EN 50380.
QCPV Certification ongoing.
Certification holder:
Hanwha Q CELLS GmbH



Horizontal packaging

1940mm

1100mm

1220mm

751 kg

28 pallets

24 palle

s 32 modules

PACKAGING INFORMATION

Note: Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

Made in Korea

Hanwha Q CELLS Australia Pty Ltd

Suite 1, Level 1, 15 Blue Street, North Sydney, NSW 2060, Australia | **TEL** +61 (0)2 9016 3033 | **FAX** +61 (0)2 9016 3032 | **EMAIL** q-cells-australia@q-cells.com | **WEB** www.q-cells.com/au

Specifications subject to technical changes © **Q CELLS** Q.PEAK DUO ML-G10.a+_385-410_2021-06_Rev01_AU

Engineered in Germany

