

# Regent IV

## 190 lm/W LED Highbay range

### Key Features

- High efficiency 190 lm/W
- High performance
- Aluminium alloy housing
- 1.5m cable and plug
- 5 year warranty



### Specifications

<b>Input Voltage</b>	100-240V, 50/60Hz
<b>Power Factor</b>	>0.95
<b>Dimmable</b>	Yes / No
<b>Colour Rendering Index (Ra)</b>	80+
<b>Efficiency</b>	190 lm/W
<b>Ingress Protection</b>	IP66
<b>Impact Rating</b>	IK08
<b>Housing Finish</b>	Black
<b>Operating Temperature</b>	-30°C to 55°C
<b>Warranty</b>	5 year

### Options

CCT 4000K CRI > 80




Surface mount bracket MB3E



**SENS10V**  
Daylight harvesting  
and Microwave sensor



**HD03R**  
Remote control

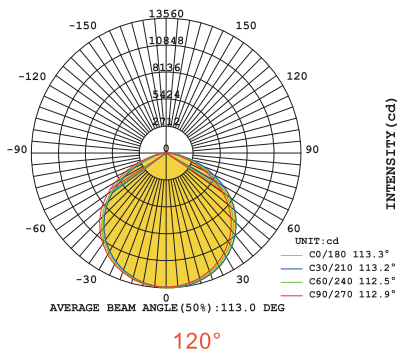

### Ordering information

Item No.	Model No.	Power	CCT	Lumens	Beam	N.W.	Dimensions
3020209	HB100-190	100W	5000K	19,000lm	120°	4.15kg	ø330x160mm
3020214	HB120-190	120W	5000K	22,800lm	120°	4.15kg	ø330x160mm
3020215	HB150-190	150W	5000K	28,500lm	120°	4.7kg	ø330x160mm
3020223	HB200-190	200W	5000K	38,000lm	120°	4.7kg	ø330x160mm