


## SURFACE FITTINGS

### LUSTRE LED CCT3 SELECTABLE



#### LUSTRE LED CCT3 selectable

- Suitable for use in retail shops, public buildings, communal areas, sports centers, stairwells, corridors, walkways
- Colour temperature selectable: switch on the inside of the fitting allows selection of 3000K, 4500K or 6500K
- LED replacement for 32W T8 and 40W T8
- Pressed steel base with twist and lock type PMMA diffuser
- High efficacy of 73-90lm/W
- Suitable for use 24/7
- Suitable for switching by external PIR, Microwave or Photocell

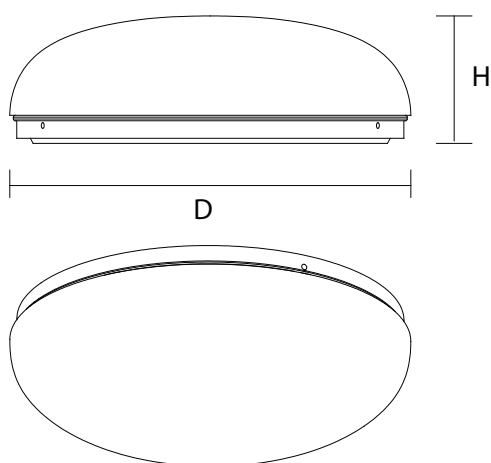

	18W	24W
D	322mm	372mm
H	97mm	107mm



3000K



4500K



6500K

	18W	24W
Standard	<b>RLU18CCT3-01</b>	<b>RLU24CCT3-01</b>
<b>Comparable to:</b>	32W T8	40W T8
<b>Total Power (W):</b>	19.1/18.6/19.3	25.4/24/25.6
<b>Total Light Output (lm):</b>	1,408/1,618/1,507	1,843/2,050/1,882
<b>Efficacy (lm/cctW):</b>	74/87/78	73/85/73
<b>Lifetime (hrs):</b>	30,000	30,000
<b>Lux at 1m (lux):</b>	294/316/285	280/295/265
<b>Beam Angle (deg):</b>	120	120
<b>CCT (K):</b>	3000/4500/6500	3000/4500/6500
<b>CRI:</b>	80	80
<b>IP:</b>	20	20
<b>Impact Rating (IK):</b>	07	07
<b>Power Factor (PF):</b>	0.9	0.9
<b>Diameter (mm):</b>	322	372
<b>Depth (mm):</b>	97	107
<b>Box Qty:</b>	1	1
<b>Weight (kg):</b>	0.7	0.9